

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/16/19	


APPROVED: _____


DATE: _____ TITLE: _____

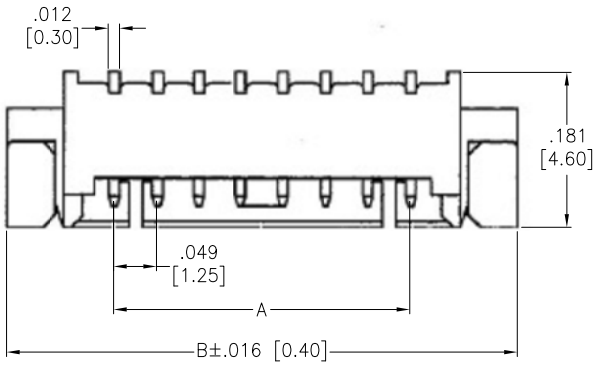

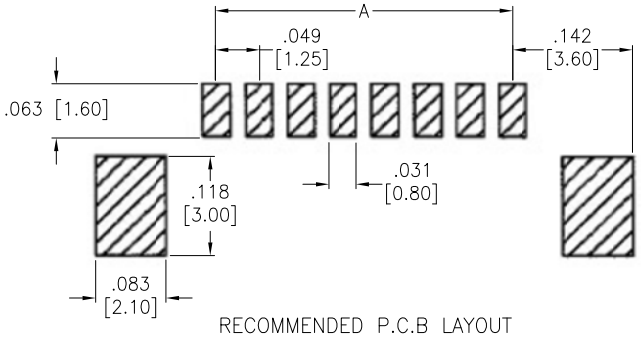

RECOMMENDED P.C.B LAYOUT

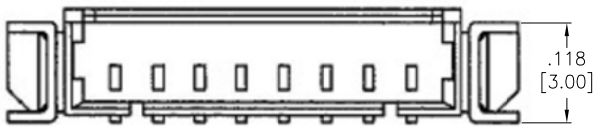



PACKAGED ON TAPE & REEL
Positions: 02 thru 15
A= .049 [1.25] x No. of Spaces
B= .049 [1.25] x No. of Space + .254 [6.45]

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Contacts: Phosphor Bronze Matte Tin plated
Tab: Brass Matte Tin plated
Electrical:
Current rating: 1A AC, DC
Voltage rating: 125V AC, DC
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
-40°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	OW	4/16/19
CHECKED	TW	4/16/19
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
1.25MM PITCH RIGHT ANGLE SMT TYPE

SIZE	PART NO.	REV.
X	125SH-A-XX-MTR-SMT-T/R	-

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1