
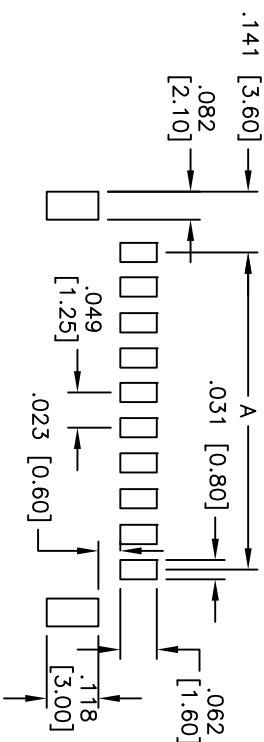

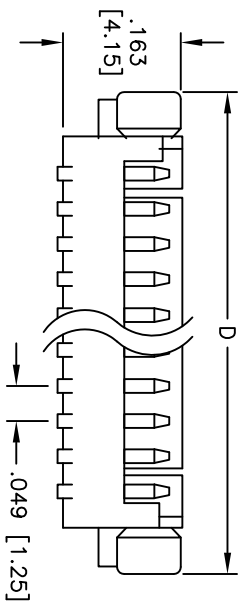


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/21/11	
A		REVISED COLOR	5/16/11	

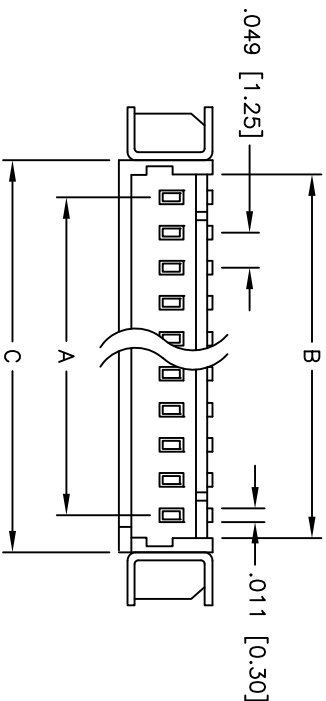

RECOMMENDED
PCB LAYOUT
PCB THICKNESS .031 [0.8mm]

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:

Insulator: Nylon 46, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Ratings:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C. for 5 sec.



Poles: 2 thru 15
A=.049 [1.25] X No. of Spoces
B=.049 [1.25] X No. of Spoces + .070 [1.80]
C=.049 [1.25] X No. of Spoces + .118 [3.00]
D=.049 [1.25] X No. of Spoces + .251 [6.40]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

MX 1.25mm WAFER SMT RIGHT ANGLE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	AY		3/21/11				
CHECKED	AH		3/21/11				
APPROVED							
				SIZE	PART NO.	REV.	
				X	125SH-A-XX-TR-SMT-T/R	A	
REF: S00124T				SCALE: NTS	SHEET 1 OF 2		

