










APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/8/13	
A		UPDATED DRAWING	12/10/20	OW/CC

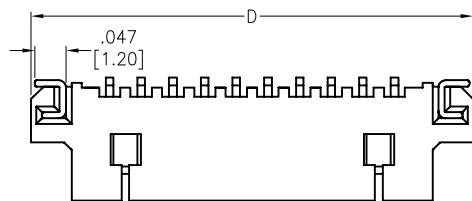

2P

3P

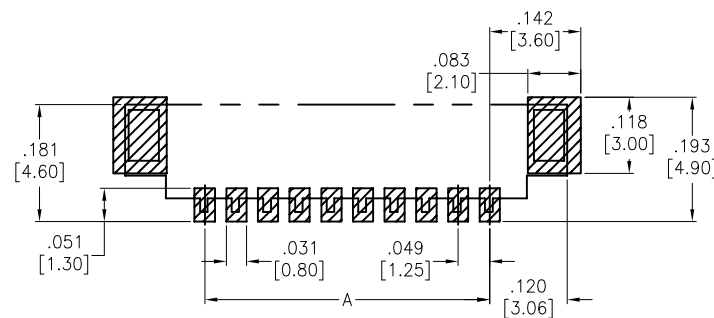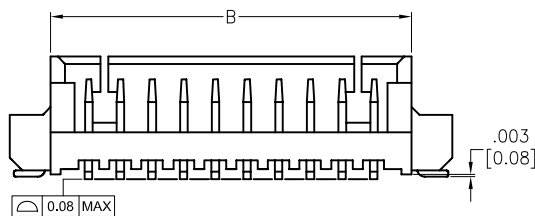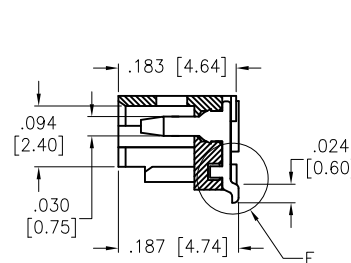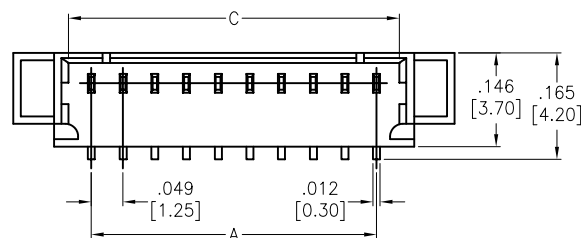

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Brass, Matte Tin plated

Electrical:

Current rating: 1A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 100 Mohms min

Withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

-40°C to +85°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 2 thru 15

A= .049 [1.25] x No. of Spaces

B= .049 [1.25] x No. of Spaces +.118 [3.00]

C= .049 [1.25] x No. of Spaces +.071 [1.80]

D= .049 [1.25] x No. of Spaces +.252 [6.40]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS

DATE

DRAWN AY 11/8/13

CHECKED LW 11/8/13

APPROVED

ADAM TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 .049 [1.25] PITCH WIRE TO BOARD HEADER
 STRAIGHT, SMT TYPE

SIZE X PART NO. 125SH-B-XX-MTS-SMT-T/R REV. A

REF: S00124T SCALE: NTS SHEET 1 OF 1