

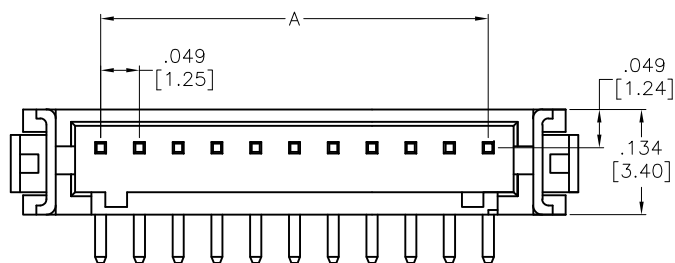
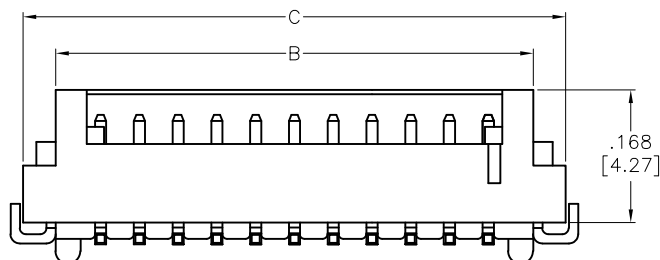


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/20/17	
A		UPDATE SPEC.	2/3/20	AY/EY

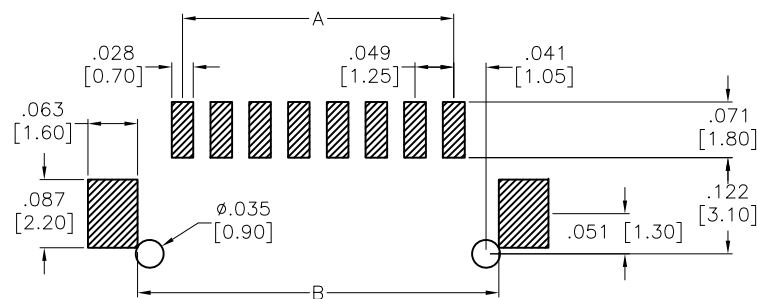

RECOMMENDED PCB LAYOUT

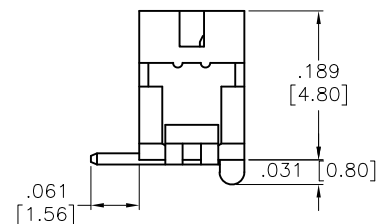

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Conductor: Brass, Tin plated
Electrical:
 Voltage rating: 125V AC/DC
 Current rating: 1A AC/DC
 Contact resistance: 20 mohms max
 Insulation resistance: 100 Mohms min
 Withstanding voltage: 250 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 02 thru 15

A = .049 [1.25] X No. of Spaces

B = .049 [1.25] X No. of Spaces + .114 [2.90]

C = .049 [1.25] X No. of Spaces + .197 [5.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ±.10 .XX ± .020 Ø.XX ±.015 .XXX ± .015 Ø.XXX ±.010				<div>ADAM TECH</div> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 INTERCONNECTSFax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	HR	11/20/17		.049 [1.25] PITCH WIRE TO BOARD HEADER STRAIGHT, SMT TYPE, TIN PLATED	
CHECKED	TY	11/20/17		SIZE X	PART NO. 125SH-C1-XX-TS-SMT-T/R
APPROVED				REF: S00015T	SCALE: NTS
				SHEET 1 OF 1	