

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/10/22	
A		UPDATE DIM.	3/7/23	LH/MC


APPROVED: _____


DATE: _____ TITLE: _____

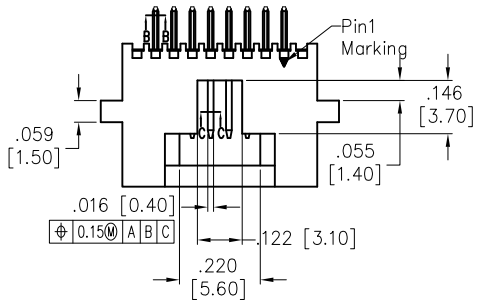





RECOMMENDED PCB LAYOUT

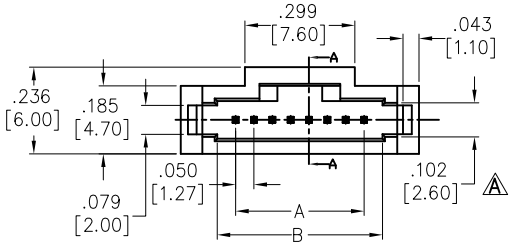

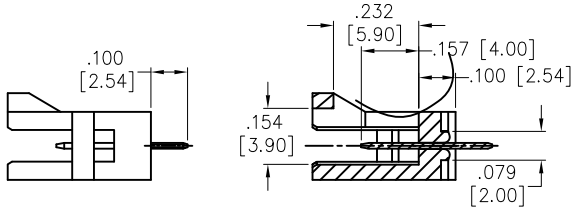


SECTION A–A

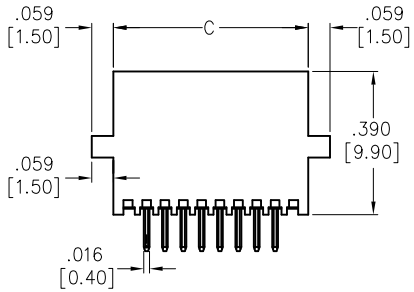



SECTION B–B



SECTION C–C

SPECIFICATIONS:
Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold Flash over Nickel underplate on contact area,
Tin over Nickel underplate on solder tails
Electrical:
Voltage rating: 250 VAC/DC
Current rating: 1 A
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

Positions: 04 thru 50
A = .050 [1.27] x No. of Space
B = .050 [1.27] x No. of Space + .100 [2.55]
C = .050 [1.27] x No. of Space + .181 [4.60] ⚠

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	6/10/22
CHECKED	KC	6/10/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .050 [1.27] WAFER, DIP TYPE, STRAIGHT, SEL-GOLD PLATED

SIZE	PART NO.	REV.
X	127SH-A-XX-SGS	A

REF: S00019C | SCALE: NTS | SHEET 1 OF 1