
Rev	AWO #	Description	Date	Appr
-		RELEASED	3/11/16	

APPROVED: _____

DATE: _____ TITLE: _____

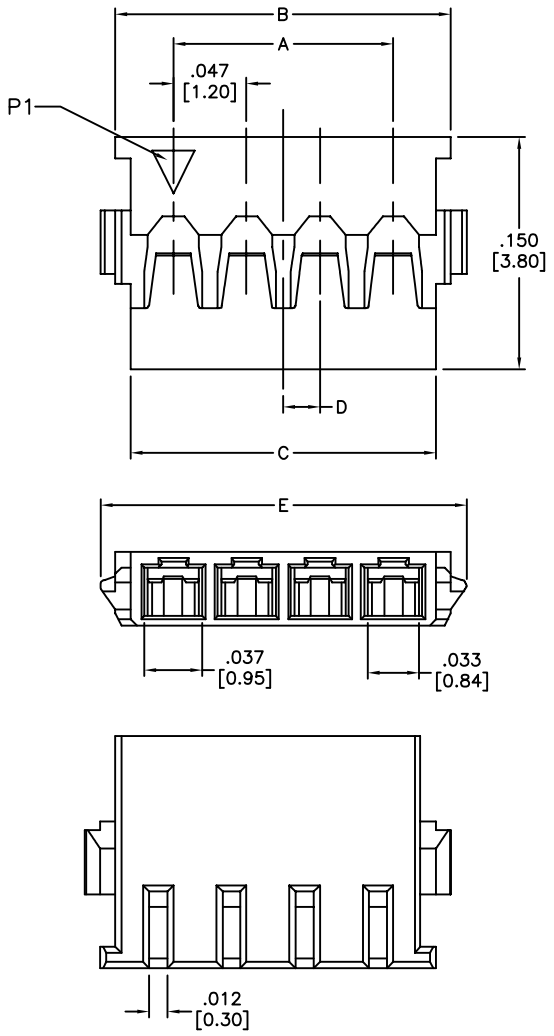

Positions: 02 thru 15
A = .047 [1.20] x No. of Spaces
B = .047 [1.20] x No. of Spaces + .075 [1.90]
C = .047 [1.20] x No. of Spaces + .055 [1.40]
D = 3, 5, 7, 9, 11, 13, 15= .047 [1.20]
2, 4, 6, 8, 10, 12, 14= .024 [0.60]
E = .047 [1.20] x No. of Spaces + .094 [2.40]

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V–0
Insulator color: Black
Electrical:
Current Rating: 2A/2P, 3P (28AWG) AC,DC
1.5A/4P (28AWG) AC,DC
1.0A/2~4 (30AWG) AC,DC
Contact resistance: 10 mΩ max
Insulation resistance: 100MΩ min
Dielectric withstanding voltage: 500 VAC for 1 minute
Operating temperature: −25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	3/11/16
CHECKED	SY	3/11/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
1.2MM PITCH CRIMP HOUSING

SIZE	PART NO.	REV.
X	12CH-A1-XX-BK-HF	-

REF: S00124T | SCALE: NTS | SHEET 1 OF 1