

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/21/20	


APPROVED: _____


DATE: _____ TITLE: _____

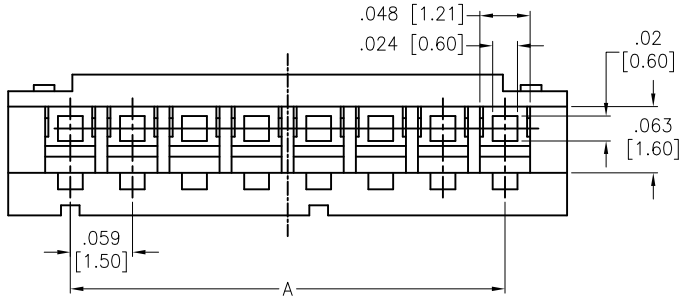

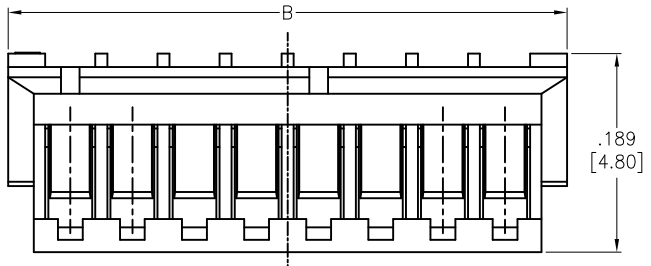

07P~15P



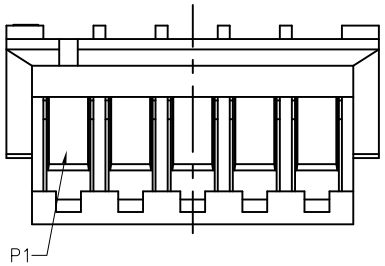

02P~06P

Positions: 02 thru 15
A= .059 [1.50] x No. of Space
B= .059 [1.50] x No. of Space + .118 [3.00]

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: White
Electrical:
Voltage rating: 100V DC/AC
Current rating: 1A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	5/21/20
CHECKED	BL	5/21/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .059 [1.50] PITCH CRIMP HOUSING

SIZE	PART NO.	REV.
X	15CH-A2-XX	-

REF: S00186T | SCALE: NTS | SHEET 1 OF 1