

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/21	
A		UPDATE DIM.	3/24/21	LH
B		UPDATE DRAWING	11/16/21	WX/YC
C		UPDATE DRAWING	8/23/22	LH/TY


APPROVED: _____


DATE: _____ TITLE: _____

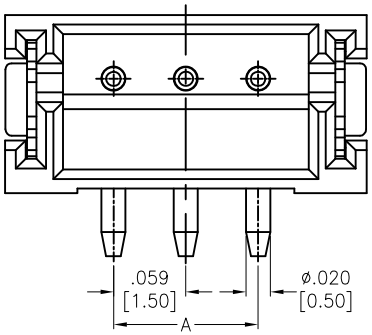

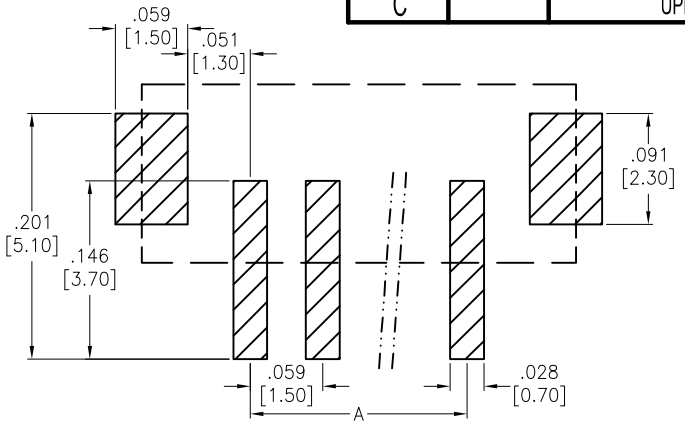

RECOMMENDED PCB LAYOUT

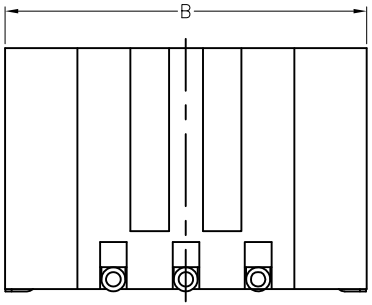



SPECIFICATIONS:

Material:

Insulator: Hi–Temp Thermoplastic, rated UL 94V–0

Insulator color: White

Contacts: Brass

Solder Tab: Phosphor Bronze, Tin plated

Cap: Hi–Temp Thermoplastic, rated UL 94V–0

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 50V AC/DC

Current rating: 1A AC/DC

Contact resistance: 20 mΩ Max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: –25°C to +85°C

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 02 thru 16

A= .059 [1.50] x No. of Space

B= .059 [1.50] x No. of Space + .177 [4.50]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	1/11/21
CHECKED	BL	1/11/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .059 [1.50] WAFER ,STRIGHT SMT TYPE, TIN PLATED

SIZE	PART NO.	REV.
X	15SH-A1-XX-TS-SMT-T/R	C

REF:	SCALE:	SHEET
S00111C	NTS	1 OF 1