

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/20/18	


APPROVED: _____


DATE: _____ TITLE: _____

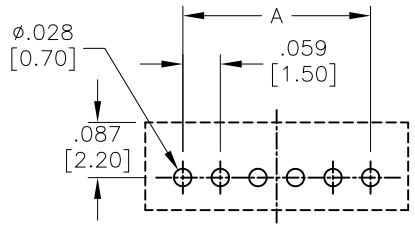



RECOMMENDED PCB LAYOUT

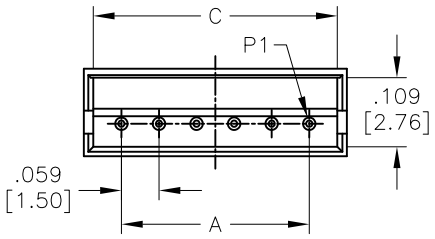


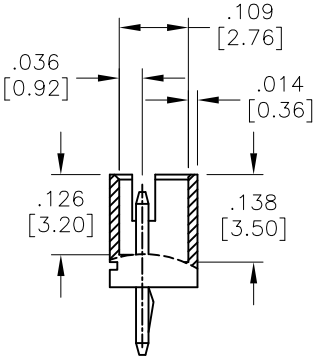

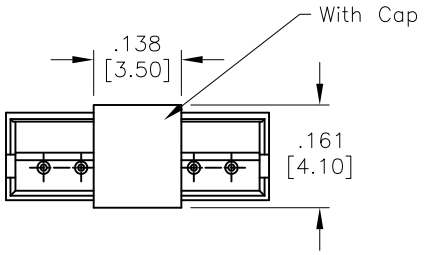

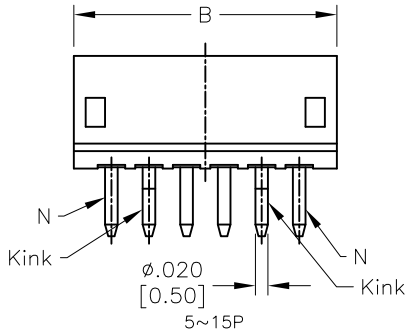

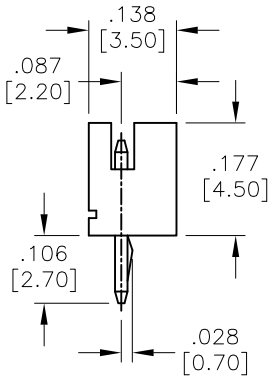

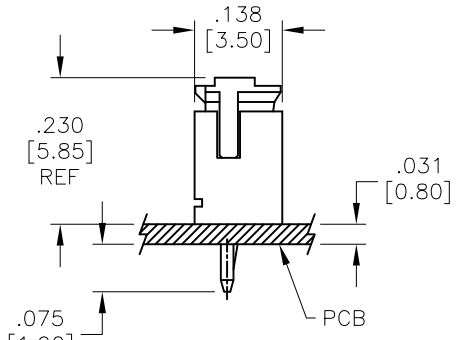

RECOMMENDED ASSEMBLY DIM.

KinK						
Circuit	Circuit No.					
	1	2	3	4	5~14	6~15
2	KinK	KinK	—	—	—	—
3	KinK	—	KinK	—	—	—
4	KinK	—	—	KinK	—	—
5~15	N	KinK	—	—	KinK	N

SPECIFICATIONS:

Material:

Insulator: (LCP) Hi–Temp Thermoplastic, rated UL 94V–0

Insulator color: Natural

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 100V AC/DC

Current rating: 1A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

–25°C to +85°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 2 thru 15

A=.059 [1.50] X No. of Spaces

B=.059 [1.50] X No. of Positions + .059 [1.50]

c=.059 [1.50] X No. of Positions + .030 [0.75]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	6/20/18
CHECKED	SL	6/20/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .059 [1.50] VERTICAL HEADER, HI-TEMP

SIZE	PART NO.	REV.
X	15SH-A2-XX-GS-HT-PP-T/R	-

REF: S00186T | SCALE: NTS | SHEET 1 OF 1