

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/21/20	


APPROVED: _____

DATE: _____ TITLE: _____

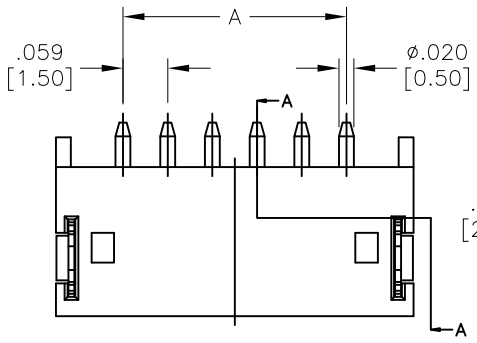


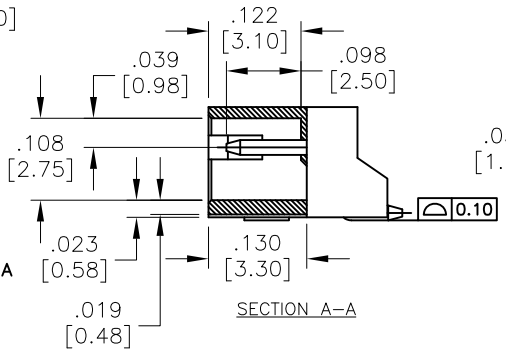



SECTION A–A

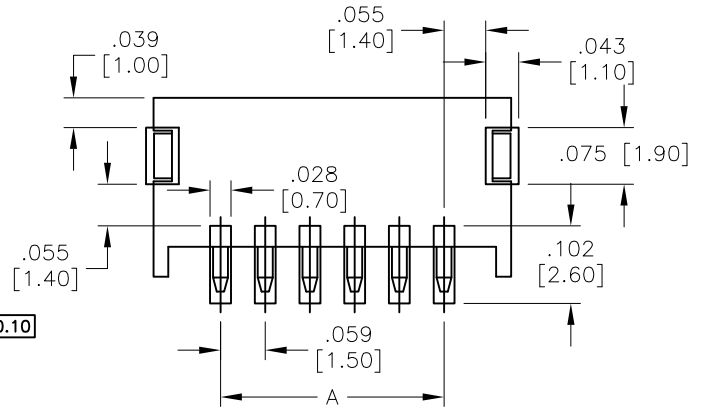

RECOMMENDED PCB LAYOUT

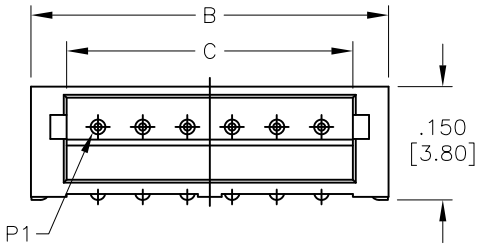

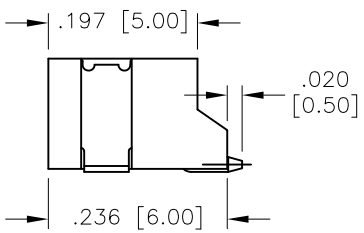

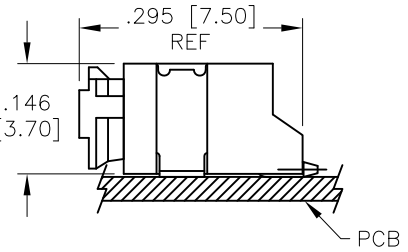

RECOMMENDED ASSEMBLY DIM.

SPECIFICATIONS:

Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Natural
Contacts: Brass
Solder Tab: Brass, Matte Tin plated
Plating:
Matte Tin over Nickel underplate overall
Electrical:
Voltage rating: 100V AC/DC
Current rating: 1A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
–25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 02 thru 13
A=.059 [1.50] X No. of Spaces
B=.059 [1.50] X No. of Spaces + .177 [4.50]
c=.059 [1.50] X No. of Spaces + .083 [2.10]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	5/21/20
CHECKED	BL	5/21/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .059 [1.50] WAFER ,RIGHT ANGLE, SMT TYPE MATTE TIN PLATED

SIZE	PART NO.	REV.
X	15SH-A2-XX-MTR-SMT-T/R	-

REF: S00186T | SCALE: NTS | SHEET 1 OF 1