


Rev	AWO #	Description	Date	Appr
-	8367	RELEASED	3/17/08	


APPROVED: _____

DATE: _____ TITLE: _____

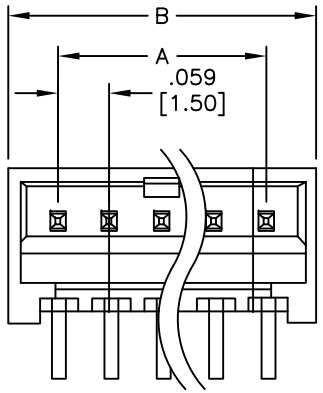

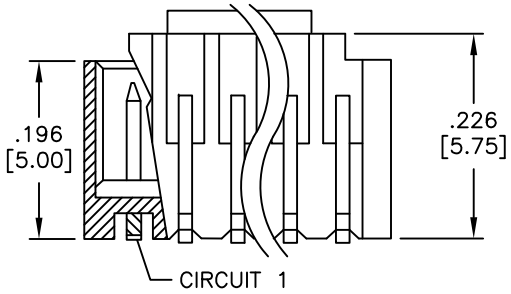

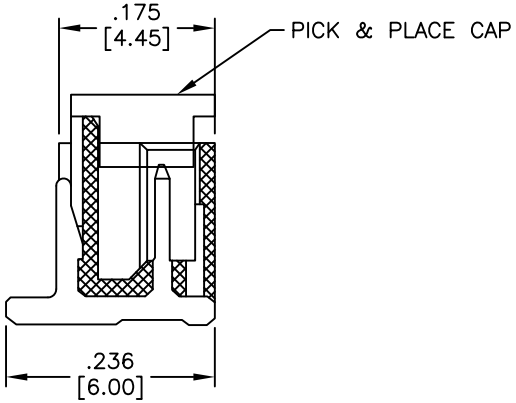

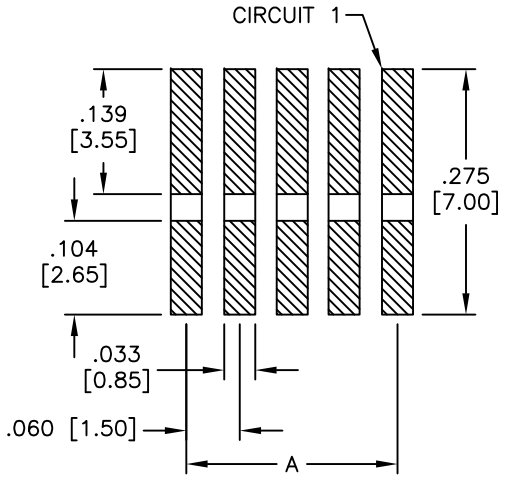

PCB LAYOUT

A=.060 [1.50] X No. of Positions −1
B=.060 [1.50] X No. of Positions + .051 [1.30]

SPECIFICATIONS:
Material:
Insulator: Hi−temp thermoplastic, rated UL 94V−0
Insulator color: Ivory
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Operating voltage: 100 VAC max
Current rating: 1 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: −25°C to +85°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	3/17/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX1.5mm WAFER 180°, SURFACE MOUNT, PICK & PLACE, TAPE & REEL

SIZE	PART NO.	REV.
X	15SH-B-XX-TS-SMT-PP-T/R	-

REF: | SCALE: NTS | SHEET 1 OF 1