

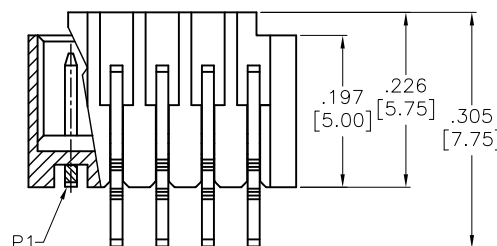



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	09/26/19	TW

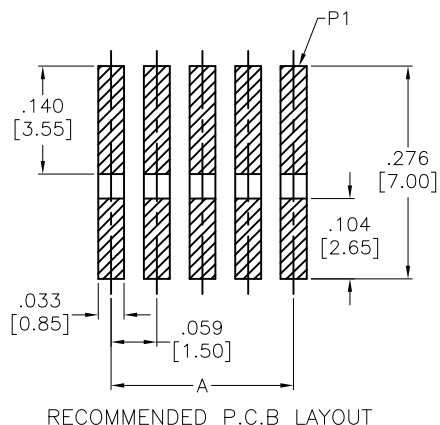

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Natural (Beige)

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 350 V AC/DC

Current rating: 3V AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 02 thru 15

A= .059 [1.50] X No. of Positions - 1

B= .059 [1.50] X No. of Positions + .051 [1.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN

AY

09/26/19

CHECKED

TW

09/26/19

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .059" [1.50mm] WAFER 90°, SURFACE MOUNT
2 THRU 15 POSITIONS, GOLD PLATED

SIZE X PART NO. 15SH-B1-XX-GR-SMT-T/R REV. -

REF: S00186T SCALE: NTS SHEET 1 OF 1