

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED



11/22/19

D



C

B

A

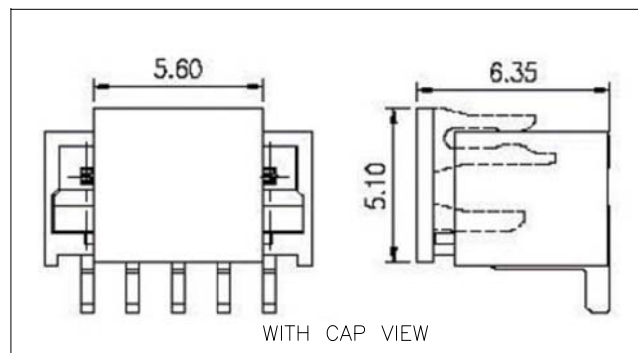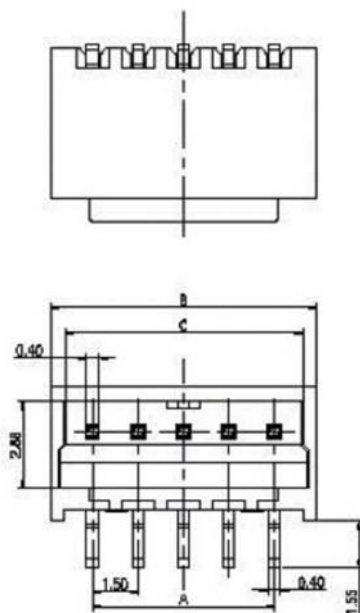

WITH CAP VIEW

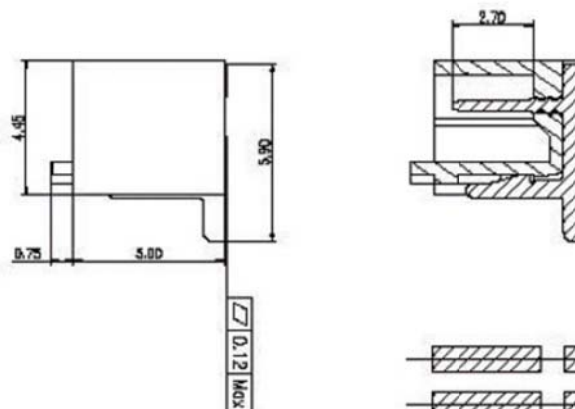

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: (PA6T) Hi-Temp Thermoplastic, rated UL 94V-0 (02-10P)
(LCP) Hi-Temp Thermoplastic, rated UL 94V-0 (11-15P)

Contact: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Current rating: 2.5A AC, DC

Voltage rating: 250V AC, DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 02 thru 15

A= 1.50 x No. of Space

B= 1.50 x No. of Space + 2.80

C= 1.50 x No. of Space + 1.85

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
.X ± 0.30	X° ± 1°
.XX ± 0.20	
.XXX ± 0.10	

APPROVALS

DATE

DRAWN

OW

11/22/19

CHECKED

LW

11/22/19

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

1.50MM WAFER 180°, SURFACE MOUNT,
TIN PLATED, W/CAP

SIZE

X

PART NO.

15SH-B4-XX-TS-SMT-PP-T/R

REV.

-

REF:

S00119T

SCALE: NTS

SHEET 1 OF 1