

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/1/21	


APPROVED: _____


DATE: _____ TITLE: _____

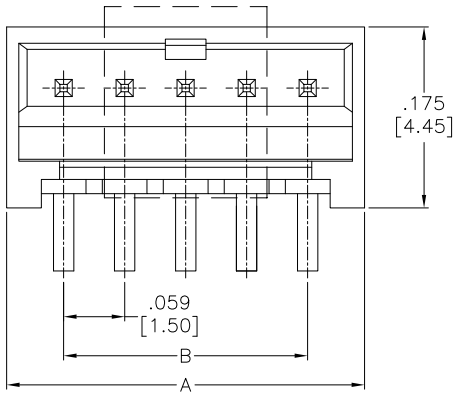

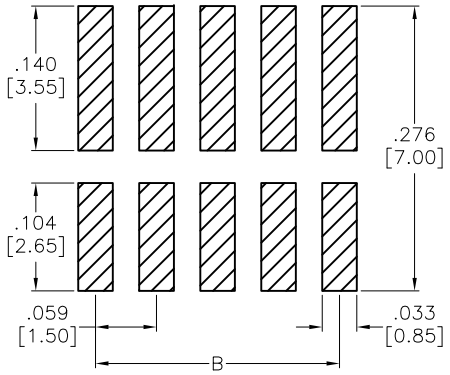

RECOMMENDED P.C.B LAYOUT

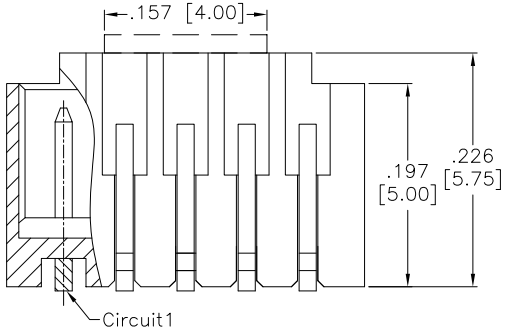

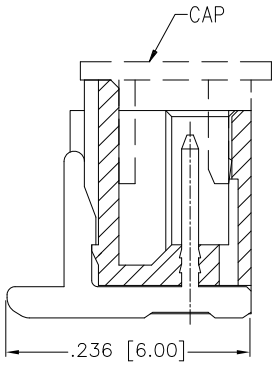

SPECIFICATIONS:

Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Natural (Beige)
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 100 V AC/DC
Current rating: 1.0 AMP
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 02 thru 20
A= .059 [1.50] x No. of Space + .110 [2.80]
B= .059 [1.50] x No. of Space

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	JJ	7/1/21
CHECKED	TY	7/1/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .059" [1.50mm] WAFER 180°, SURFACE MOUNT
2 THRU 20 POSITIONS, TIN PLATED

SIZE	PART NO.	REV.
X	15SH-B5-XX-TS-SMT-PP-TR	-

REF: S00019C | SCALE: NTS | SHEET 1 OF 1