

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/9/20	


APPROVED: _____


DATE: _____ TITLE: _____

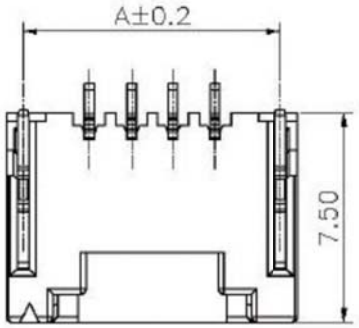

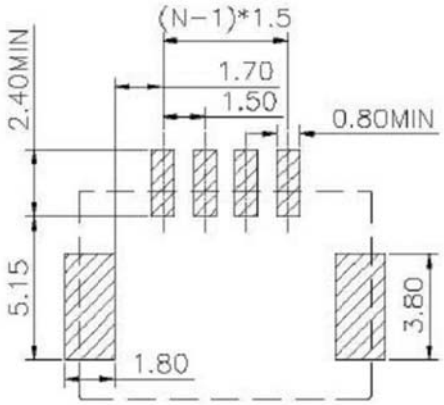

RECOMMENDED P.C.B LAYOUT

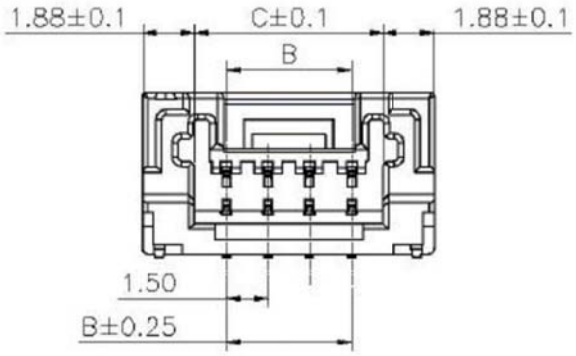

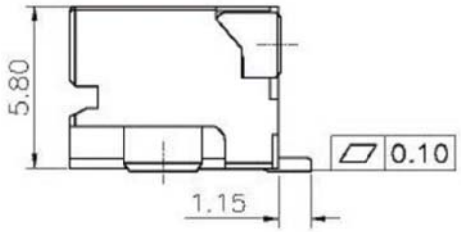

SPECIFICATIONS:

Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Natual
Contacts: Phosphor Bronze

Plating:
Tin over Nickel underplate overall

Electrical:
Voltage rating: 125 VAC/DC
Current rating: 2 A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:
-40°C to +105°C

Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 02 thru 16
A = 1.50mm x No. of Spaces + 4.75mm
B = 1.50mm x No. of Spaces
C = 1.50mm x No. of Spaces + 2.25mm

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08

APPROVALS		DATE
DRAWN	LH	11/9/20
CHECKED	EY	11/9/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.059 [1.50] WAFER , RIGHT ANGLE, SMT TYPE

SIZE	PART NO.	REV.
X	15SH-E-XX-TR-SMT-T/R	-

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1