

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description





Date

Appr

-

RELEASED

5/16/18

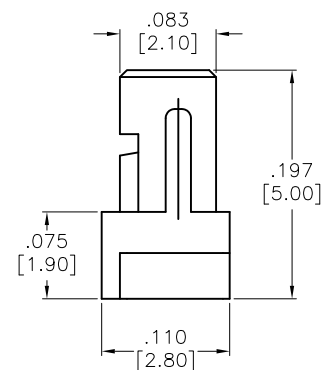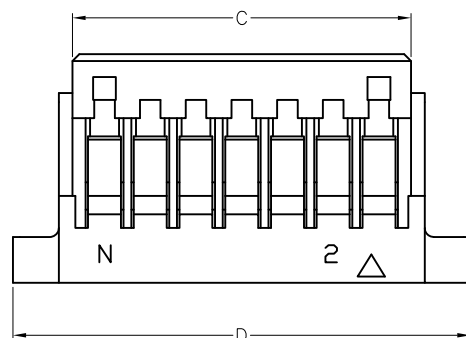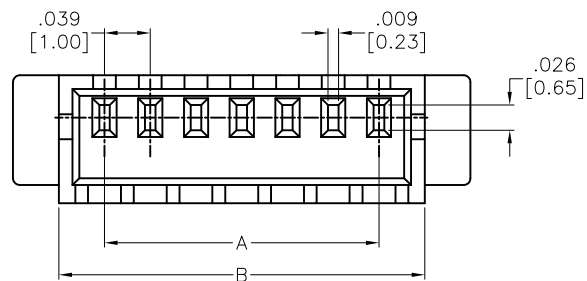

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Nature

Electrical:

Voltage rating: 50V AC/DC

Current rating: 1A AC/DC

Contact resistance: 20 mohms max.

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 02 thru 20

A= .039 [1.00] x No. of Spaces

B= .039 [1.00] x No. of Spaces + .079 [2.00]

C= .039 [1.00] x No. of Spaces + .055 [1.40]

D= .039 [1.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN

AY

5/16/18

CHECKED

LW

5/16/18

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

1.00mm CRIMP HOUSING

SIZE

X

PART NO.

1CH-A1-XX

REV.

-

REF: S00124T

SCALE: NTS

SHEET 1 OF 1