


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/20/12	




APPROVED: _____

DATE: _____ TITLE: _____

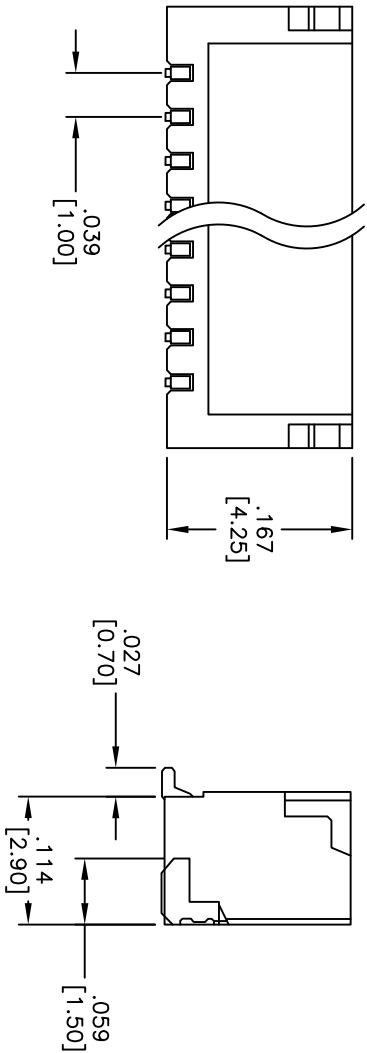

POLES	DIMENSIONS INCHES [mm]	
	A	B
2	.039 [1.00]	.157 [4.00]
3	.079 [2.00]	.197 [5.00]
4	.118 [3.00]	.236 [6.00]
5	.157 [4.00]	.276 [7.00]
6	.197 [5.00]	.315 [8.00]
7	.236 [6.00]	.354 [9.00]
8	.276 [7.00]	.394 [10.00]
9	.315 [8.00]	.433 [11.00]
10	.354 [9.00]	.472 [12.00]
11	.394 [10.00]	.512 [13.00]
12	.433 [11.00]	.551 [14.00]
13	.472 [12.00]	.591 [15.00]
14	.512 [13.00]	.630 [16.00]
15	.551 [14.00]	.669 [17.00]
20	.748 [19.00]	.866 [22.00]

PACKAGED ON TAPE & REEL

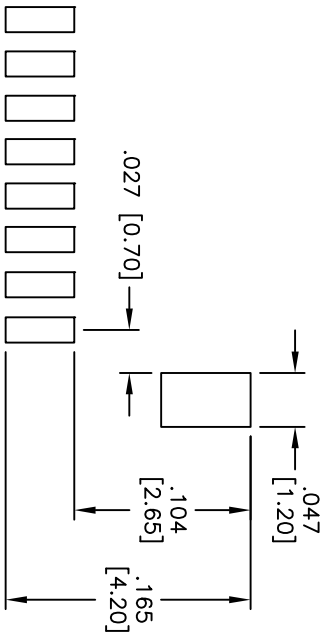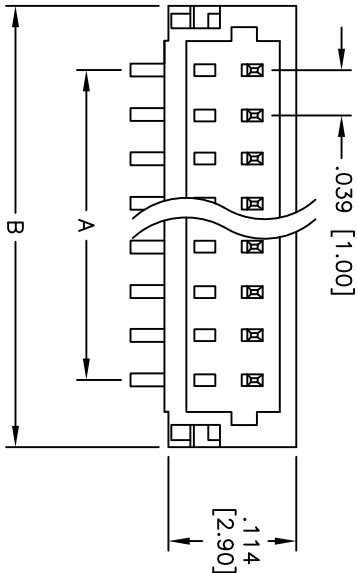

RECOMMENDED PCB LAYOUT

.039 [1.00] → →

SPECIFICATIONS:
Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Natural
Plating: Tin over Copper underplate overall
Electrical: Operating voltage: 50 VAC max
Current rating: 1 Amp max
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -25°C to +85°C
Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH			
INCHES				909 Railway Avenue, Union, NJ 07083			
HOLES				Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	ØXX	± .10	TITLE 1.0mm WIRE TO BOARD WAFER SMT TOP ENTRY			
.XX	± .020	ØXXX	± .015				
.XXX	± .015	ØXXXX	± .010				
APPROVALS				DATE			
DRAWN	AY		3/20/12	SIZE			
CHECKED	AL		3/20/12	PART NO.			
APPROVED				1SH-A-XX-TS-SMT-T/R			
REF: S00016T				SCALE: NTS			
				SHEET 1 OF 1			