

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/8/15	
A		UPDATE SPEC.	6/11/18	AY/TY
B		UPDATE SPEC.	8/19/21	LH/TL

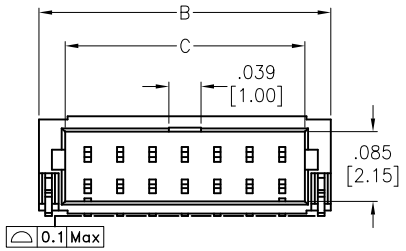


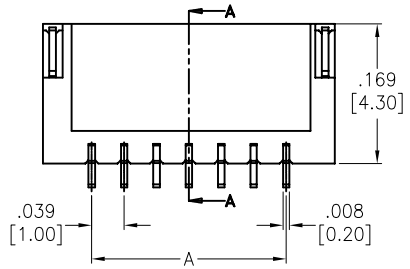


CAP STOPPER

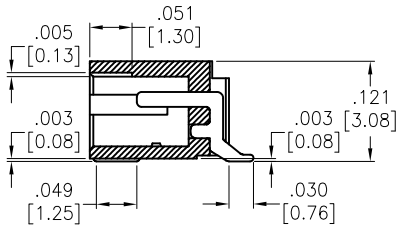

SECTION A–A

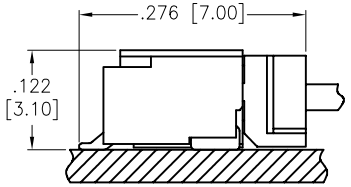

ASSEMBLED VIEW

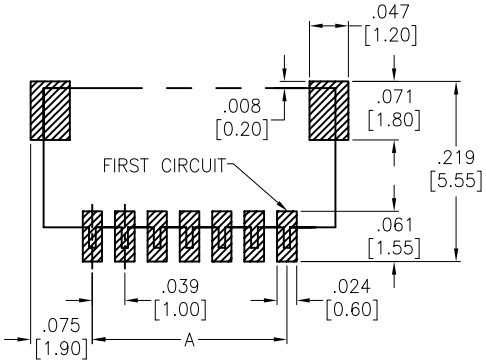

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi–Temp Thermoplastic, rated UL 94V–0

Insulator color: Natural

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 50 AC/DC

Current rating: 1A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 100 Mohms Min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

–40°C to +105°C ⚠

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 2 thru 22

A = .039 [1.00] x No. of Spaces

B = .039 [1.00] x No. of Spaces +.118 [3.00]

C = .039 [1.00] x No. of Spaces +.057 [1.45]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

DRAWN	AY	7/8/15
CHECKED	GC	7/8/15
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .039 [1.00] WIRE TO BOARD WAFER, SMT TYPE, SIDE ENTRY, TAPE & REEL

SIZE	PART NO.	REV.
X	1SH-A1-XX-TR-SMT-T/R	A

REF: S00124T | SCALE: NTS | SHEET 1 OF 1