

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/18/10	
A		UPDATED DIM.	12/20/17	HR/SL

POLES	DIMENSIONS INCHES [mm]	
	A	B
2	.039 [1.00]	.157 [4.00]
3	.079 [2.00]	.197 [5.00]
4	.118 [3.00]	.236 [6.00]
5	.157 [4.00]	.276 [7.00]
6	.197 [5.00]	.315 [8.00]
7	.236 [6.00]	.354 [9.00]
8	.276 [7.00]	.394 [10.00]
9	.315 [8.00]	.433 [11.00]
10	.354 [9.00]	.472 [12.00]
11	.394 [10.00]	.512 [13.00]
12	.433 [11.00]	.551 [14.00]
13	.472 [12.00]	.591 [15.00]
14	.512 [13.00]	.630 [16.00]
15	.551 [14.00]	.669 [17.00]
16	.591 [15.00]	.708 [18.00]
20	.748 [19.00]	.866 [22.00]

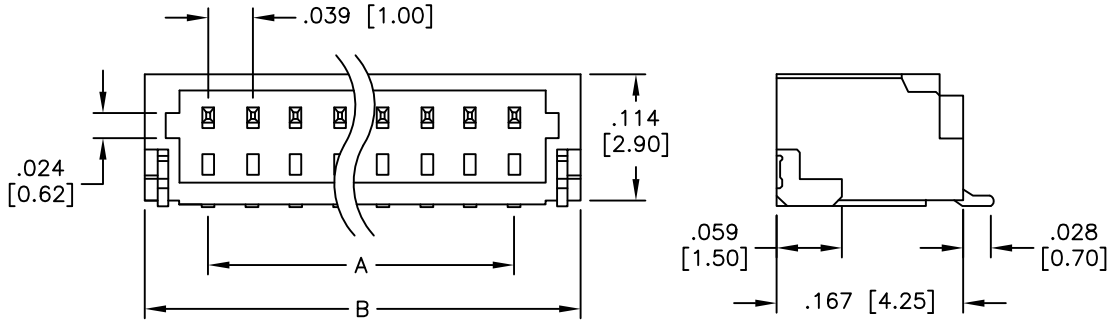

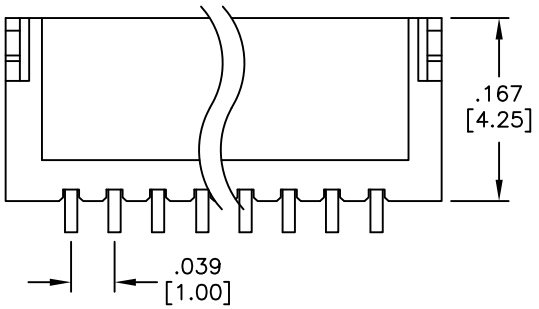

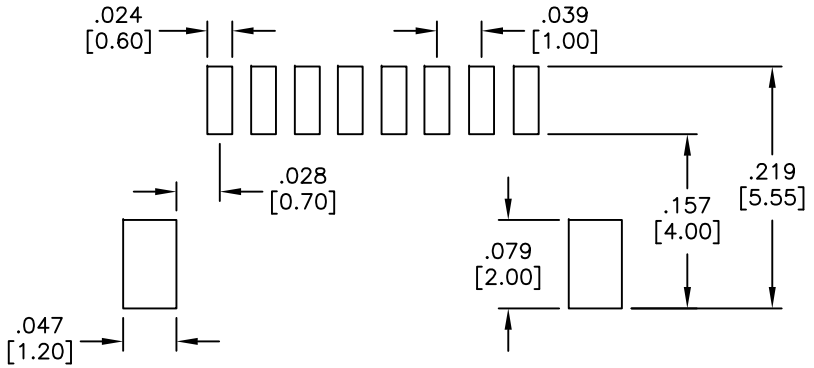

RECOMMENDED PC BOARD LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi–Temp. Thermoplastic, rated UL 94V–0
Insulator color: Natural
contact: Phosphor Bronze, Tin plated
Electrical:
Operating voltage: 50 VAC
Current rating: 1.0 A
Contact resistance: 20 mohms max.
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/18/10
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: 1.0mm WIRE TO BOARD WAFER SMT SIDE ENTRY

SIZE	PART NO.	REV.
X	1SH-B-XX-TR-SMT	A

REF: S00099T | SCALE: NTS | SHEET 1 OF 1