


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/9/20	


APPROVED: _____


DATE: _____ TITLE: _____

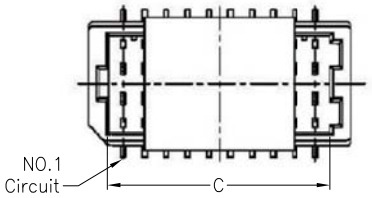



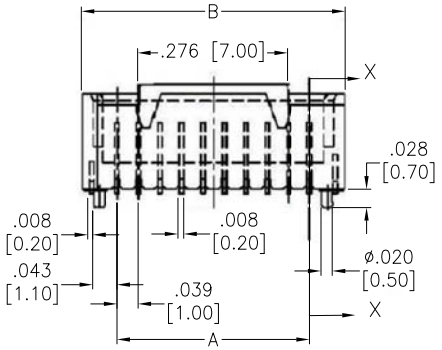

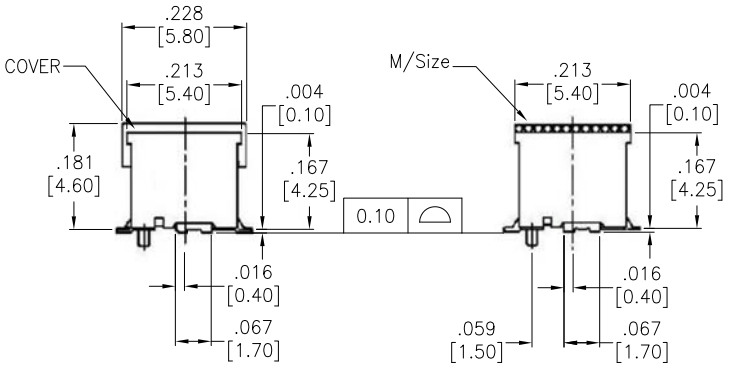

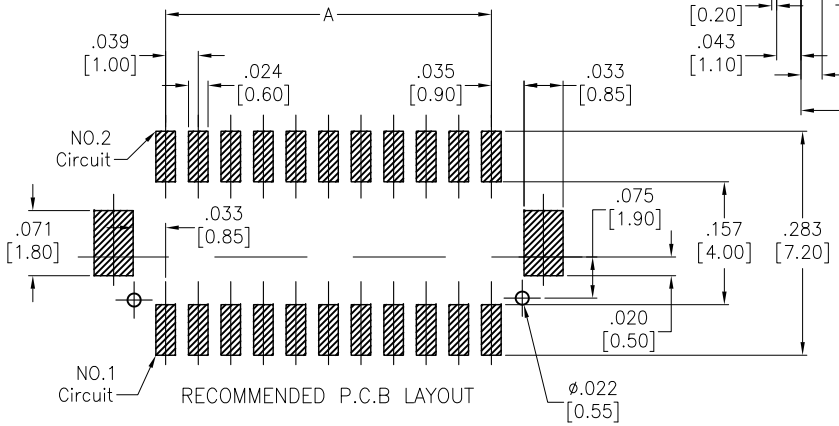

1SHD–A–XX–GS–SMT–XX–T/R

8,10,12 PIN ← = → KT

16~60 PIN ← = → PP

PACKAGED ON TAPE & REEL

Positions: 8, 10, 12, 14, 16, 18, 20, 24, 28, 30, 34, 40, 50, 60

A = .039 [1.00] x No. of Spaces

B = .039 [1.00] x No. of Spaces + .130 [3.30]

C = .039 [1.00] x No. of Spaces + .055 [1.40]

SPECIFICATIONS:

Material:

Insulator: Hi–Temp Thermoplastic, rated UL 94V–0, Color: Natural

Pin: Phosphor Bronze, Gold plated

Solder Tabs: Bronze, Gold plated

CAP: (LCP) Hi–Temp Thermoplastic, rated UL 94V–0

Electrical:

Voltage Rating: 50V AC/DC

Current Rating: 1A AC/DC

Contact Resistance: 20 mohms max

Insulation resistance: 100 Mohms min

Withstanding voltage: 500V AC for 1 minute.

Temperature Rating:

–25°C to +85°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	OW	6/9/20
CHECKED	RL	6/9/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .039 [1.00] PITCH WAFER, STRAIGHT PCB SMT TYPE, W/ PEG, W/CAP, W/MYLAR

SIZE	PART NO.	REV.
X	1SHD-A-XX-GS-SMT-XX-T/R	-

REF: S00123T | SCALE: NTS | SHEET 1 OF 1