



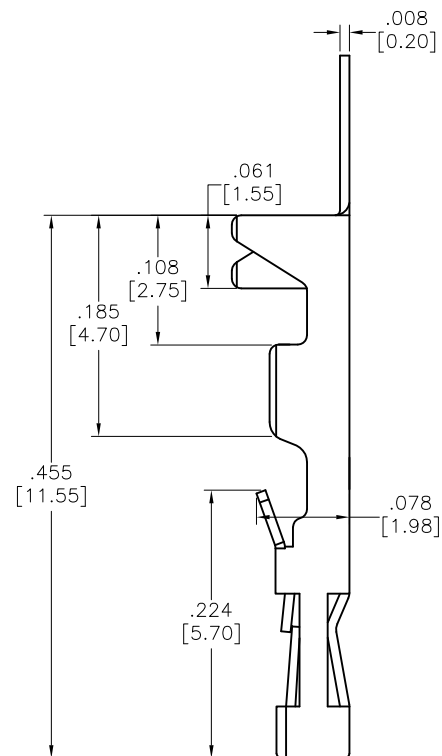


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/21	

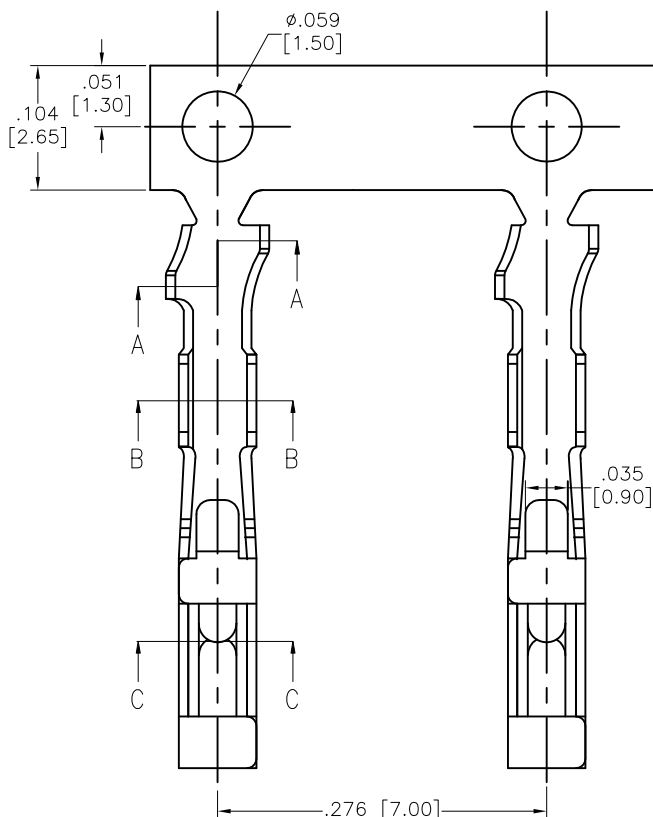

ADAM P/N	Wire range	Dim. a	Dim. b
254CTD-1-R	#22 ~ #24	.050 [1.26]	.067 [1.70]
254CTD-2-R	#26 ~ #28	.043 [1.10]	.051 [1.30]

SPECIFICATIONS:

Material: Phosphor bronze

Plating:

Tin over Nickel underplate overall

Electrical:

Current rating: 3Amp

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000V AC/DC

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	WX	5/25/21
CHECKED	KL	5/25/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH



909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .100 [2.54] CRIMP TERMINAL			
SIZE X	PART NO. 254CTD-X-R	REV. -	
REF: S00019C	SCALE: NTS	SHEET 1 OF 1	