
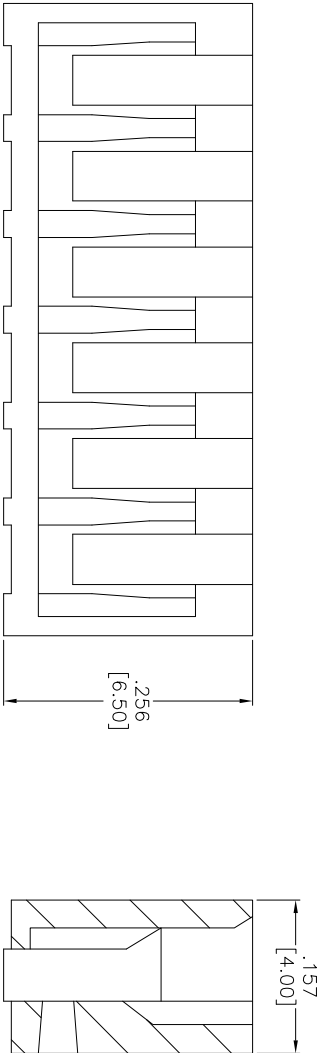


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/10	
A		ADDED DIM.	11/4/11	
B		REDRAWN	7/29/13	

APPROVED: _____
DATE: _____ TITLE: _____

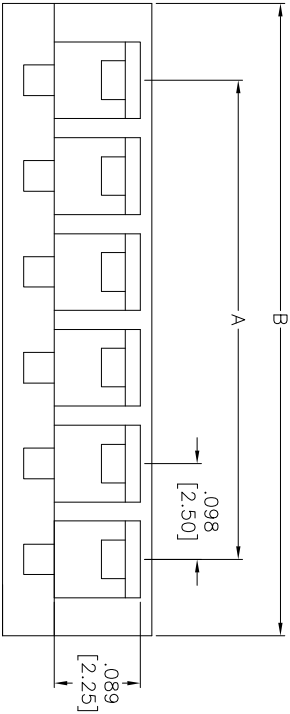

Positions: 02 thru 16
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .157 [4.00]

SPECIFICATIONS:
Material:
Insulator: Nylon 66 UL 94V-0
Insulator color: Beige
Electrical:
Voltage rating: 250V AC/DC
Current rating: 3A AC/DC
Contact resistance: 10 mΩ max
After Environmental Testing: 20 mΩ max
Insulation resistance: 800MΩ min.
Withstand voltage: 1000V AC for 1 minute.
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710 SHROUDED CRIMP THERMINAL HOUSING			
HOLES							
.X	± .10	Ø.X	± .10				
.XX	± .020	Ø.XX	± .015				
.XXX	± .015	Ø.XXX	± .010	TITLE			
APPROVALS							
DRAWN		DY	10/22/10		SIZE		
CHECKED							
APPROVED							
REF: S00015T				SCALE: NTS		SHEET 1 OF 1	
X				25CH-F-XX		REV. B	