

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/26/17	
A		UPDATE SPEC.	8/18/22	LH/TY

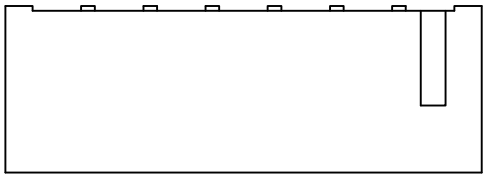


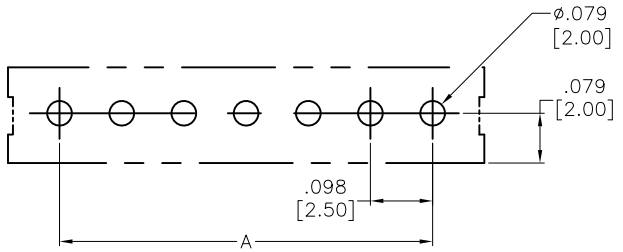

RECOMMENDED PCB LAYOUT

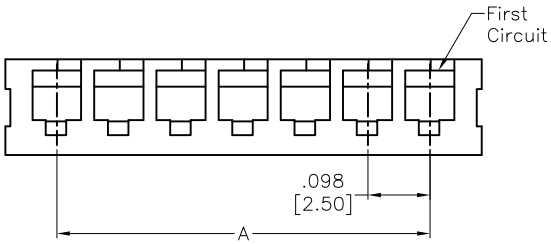

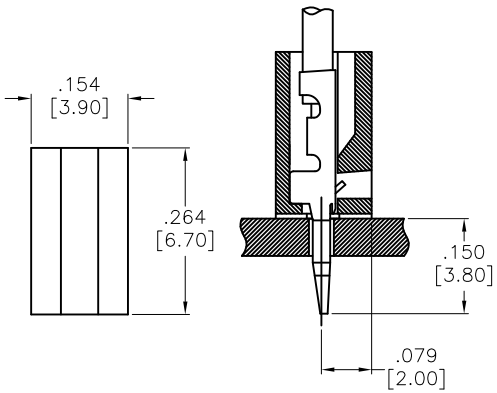

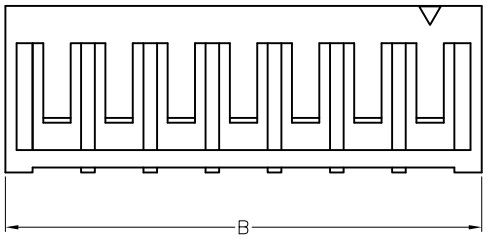

Positions: 02 thru 16
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .157 [4.00]

SPECIFICATIONS:
Material:
Insulator: Nylon 66 UL 94V-0
Insulator color: Brown A
Electrical:
Current rating: 3A AC/DC
Contact resistance: 10 mΩ max
Insulation resistence: 1000 MΩ min.
Withstand voltage: 800V AC for 1 minute.
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	9/26/17
CHECKED	NC	9/26/17
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: 2.50MM PITCH BOARD IN CONNECTOR, STRAIGHT

SIZE	PART NO.	REV.
X	25CH-F1-XX	A

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1