
Rev	AWO #	Description	Date	Appr
-		RELEASED	10/20/11	
A		REVISED SPEC.	6/11/12	

APPROVED: _____

DATE: _____ TITLE: _____

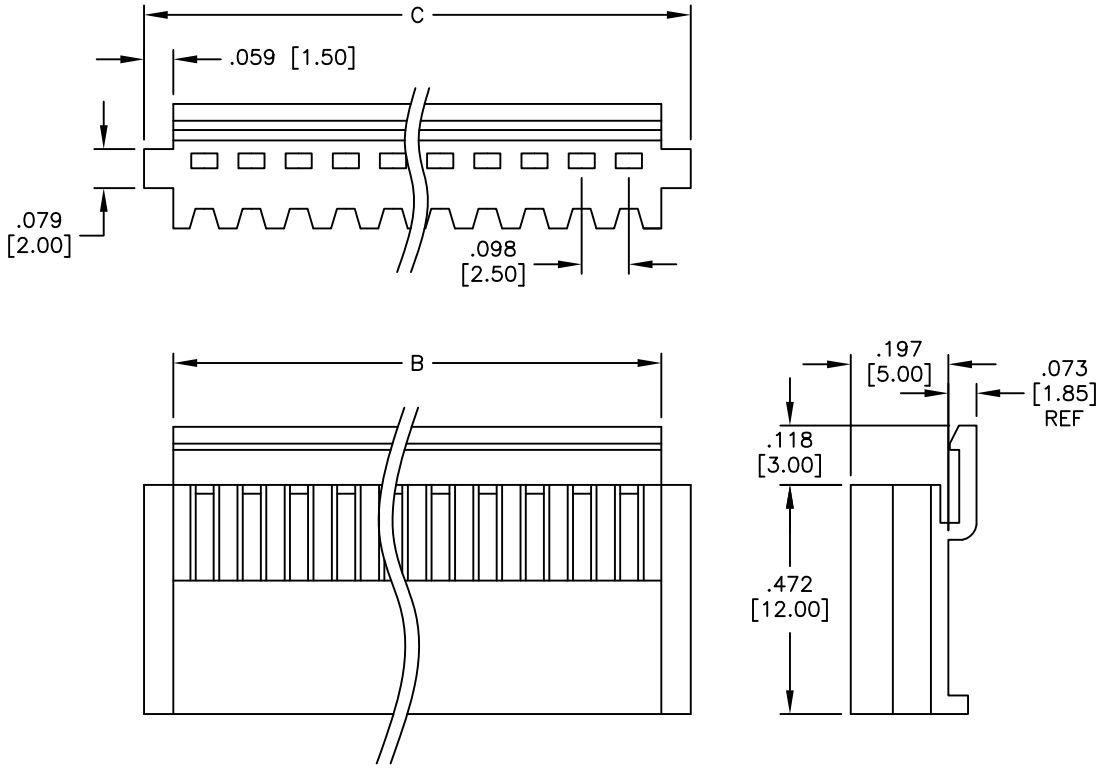

Positions: 2 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .130 [3.30]
C = .098 [2.50] x No. of Spaces + .205 [5.20]

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: White
Electrical:
Voltage rating:: 250 V AC/DC
Current rating: 3 Amps max
Contact Resistance: 15 Milliohms max.
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	10/20/11
CHECKED	NP	10/20/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.098 [2.50] SHROUDED CRIMP THERMINAL HOUSING

SIZE	PART NO.	REV.
X	25CH-M-XX	A

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1