


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/7/17	

APPROVED: _____


DATE: _____ TITLE: _____

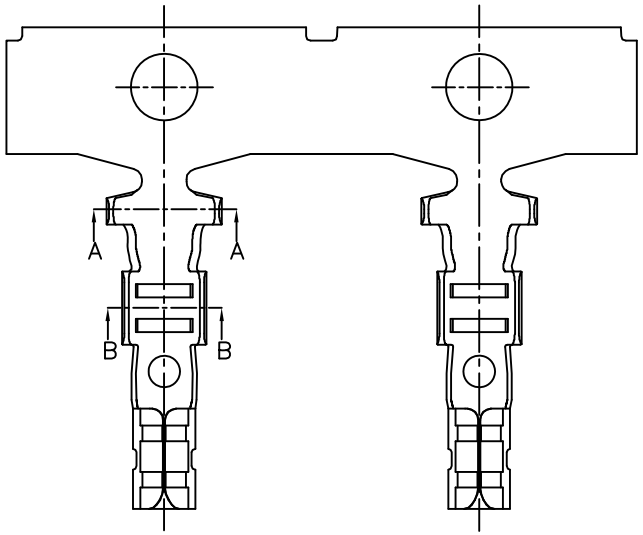

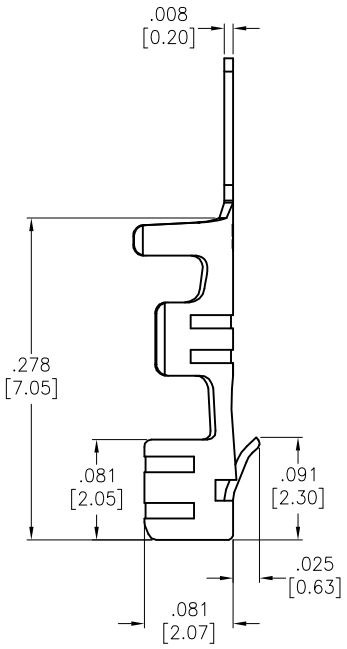




SECTION A–A



SECTION B–B



SPECIFICATIONS:
Material: 0.2mm thickness Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250 V AC,DC
Current rating: 3 A
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute
Mechanical:
Wire Range: AWG #22–28
Insulation OD: 1.9mm max
Packaging: 10,000 Pcs/Reel
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	12/7/17
CHECKED	KC	12/7/17
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

.098 [2.50] CRIMP TERMINAL

SIZE	PART NO.	REV.
X	25CTE4-R	-

REF:	SCALE:	SHEET
S00019C	NTS	1 OF 1