

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/20/17	


APPROVED: _____

DATE: _____ TITLE: _____

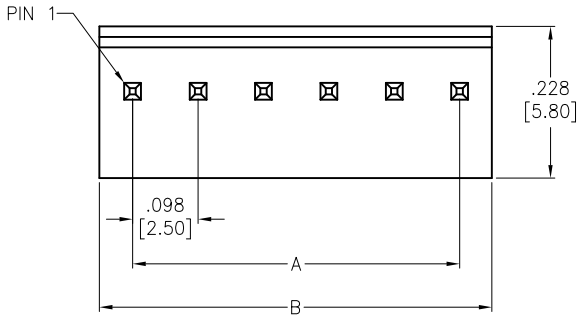

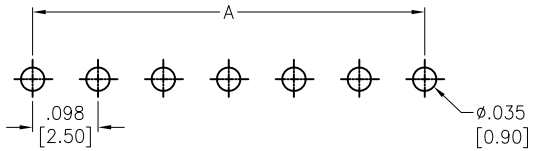

RECOMMENDED PCB LAYOUT

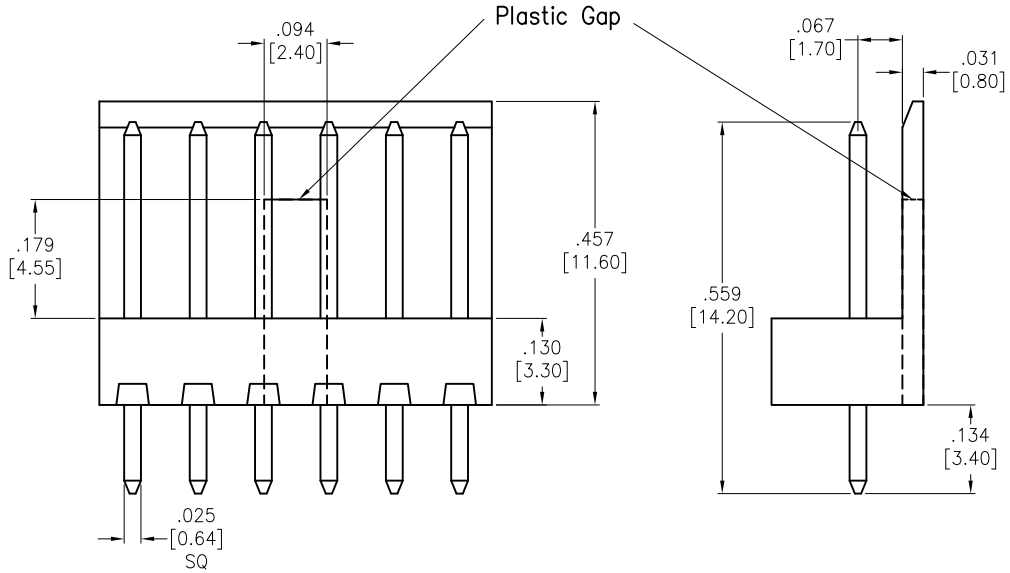

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: White
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Voltage rating: 250 VAC/DC
Current rating: 3 Amp AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 15
A= .098 [2.50] x No. of Space
B= .098 [2.50] x No. of Positions

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	10/20/17
CHECKED	OC	10/20/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .098 [2.50] LOCKING HEADER STRAIGHT, PCB, TIN PLATED

SIZE	PART NO.	REV.
X	25LHA2-XX-TS	-

REF:	SCALE:	SHEET
S00019C	NTS	1 OF 1