


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/2/20	


APPROVED: _____


DATE: _____ TITLE: _____

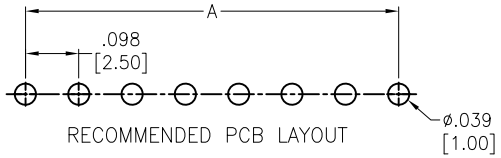

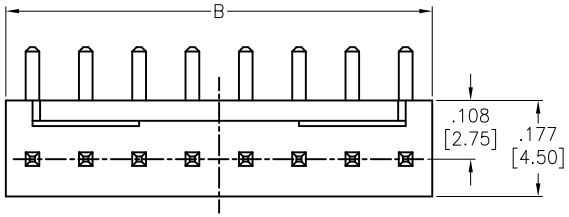

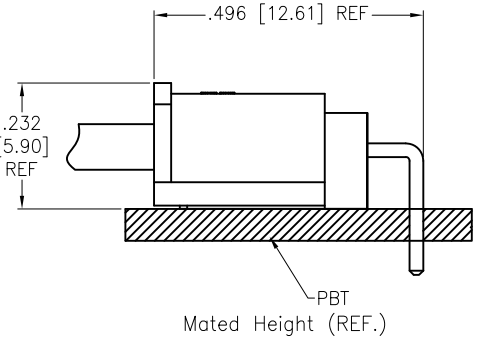

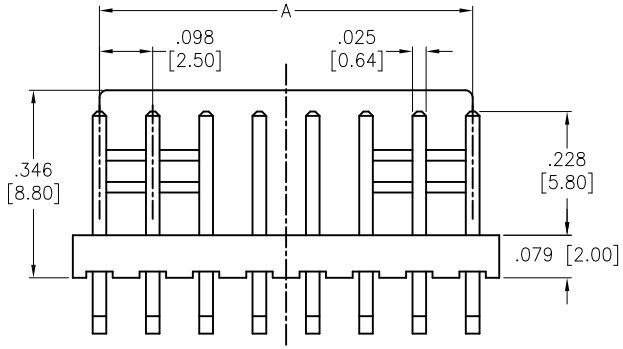



SPECIFICATIONS:
Material:
Insulator: Nylon 66 rated UL 94V-2
Insulator color: Natural
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 3A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 15
A= .098 [2.50] x No. of Space
B= .098 [2.50] x No. of Space + .098 [2.50]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	OW	12/2/20
CHECKED	JL	12/2/20
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.098 [2.50] LOCKING HEADER
RIGHT ANGLE, PCB, TIN PLATED

SIZE	PART NO.	REV.
X	25LHE-XX-TR	-

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1