


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/10	

APPROVED: _____

DATE: _____ TITLE: _____

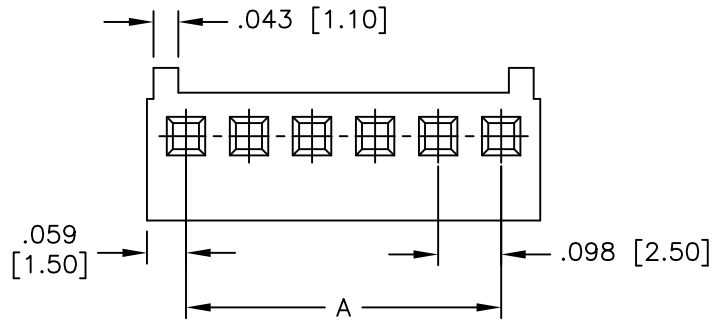

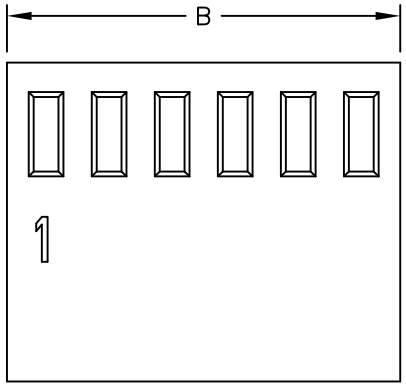

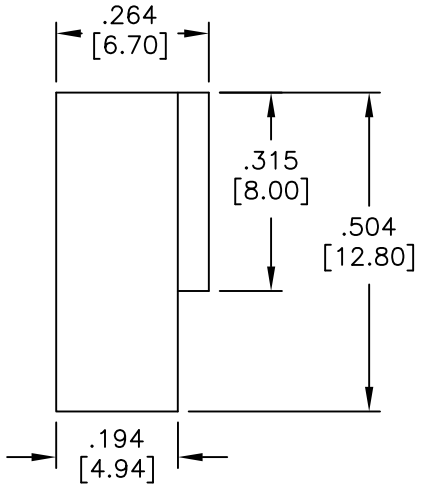

Positions: 2 thru 20
A= .098 [2.50] X No. of Spaces
B= .098 [2.50] X No. of Spaces + .118 [3.00]

SPECIFICATIONS:
Material:
Insulator: Nylon 66, Rated UL 94V–0
Insulator color: White
Contacts: Brass
Plating: Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max.
Current rating: 3 Amps max.
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1500 VAC / minute.
Temperature Rating:
Operating temperature: –40°C to +105°C

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	11/25/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HOUSING, PITCH .098 [2.50], UL94V-0 WITH POLARIZING RIB, WITH LOCKING RAMP

SIZE	PART NO.	REV.
X	25MTA-XX-V0	-

REF: S00123T | SCALE: NTS | SHEET 1 OF 1