

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	02/24/12	
A		UPDATE DRAWING	3/27/20	AY/IW

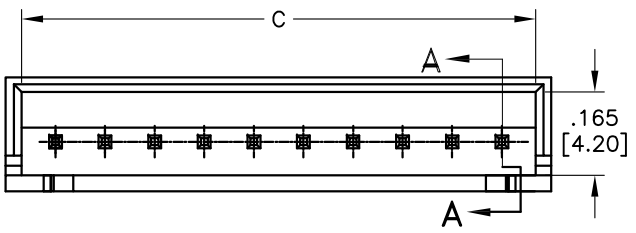

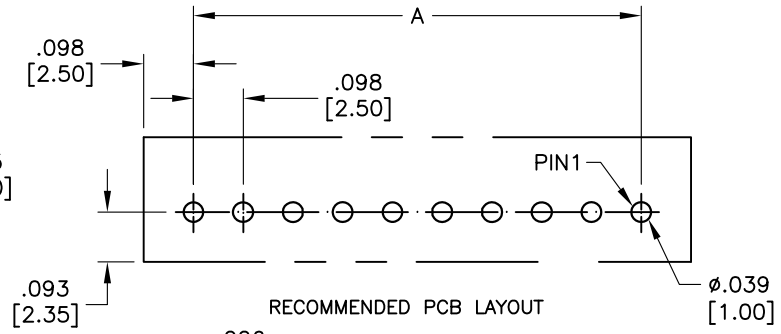


RECOMMENDED PCB LAYOUT

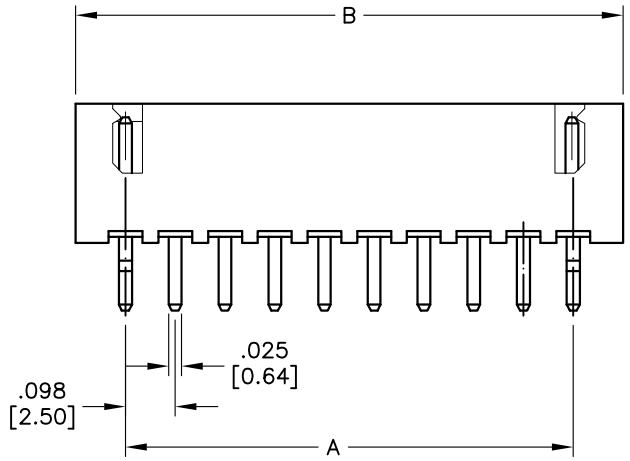


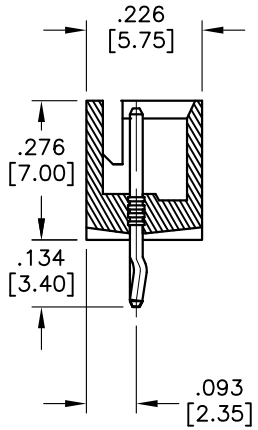

SECTION A–A



2P

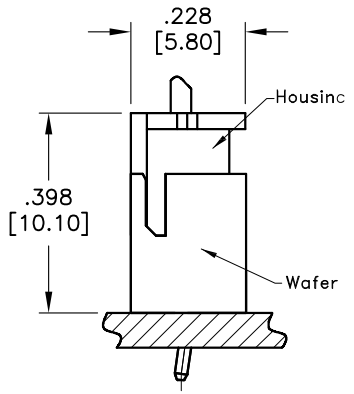

Aseemble state

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: Natural
Contact: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Withstand voltage: 1000V AC for 1 minute.
Temperature Rating:
–25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]
C = .098 [2.50] x No. of Spaces + .138 [3.50]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	02/24/12
CHECKED	AY	02/24/12
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
WIRE TO BOARD PITCH: 2.5MM
WAFER STRAIGHT TYPE W/ KINK

SIZE	PART NO.	REV.
X	25SH-B-XX-TS	A

REF: S00124T | SCALE: NTS | SHEET 1 OF 1