

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/24/20	

APPROVED: _____


DATE: _____ TITLE: _____

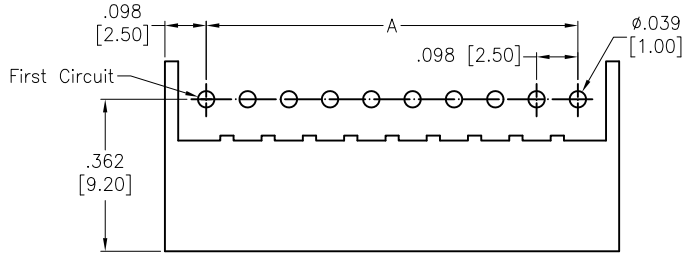


RECOMMENDED PCB LAYOUT





2P

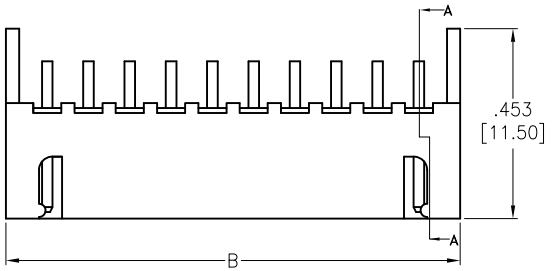

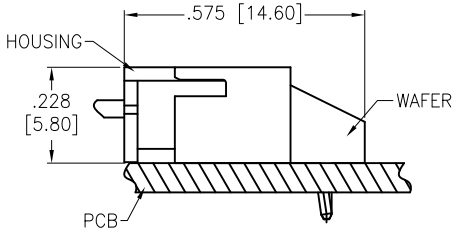

ASSEMBLY VIEW

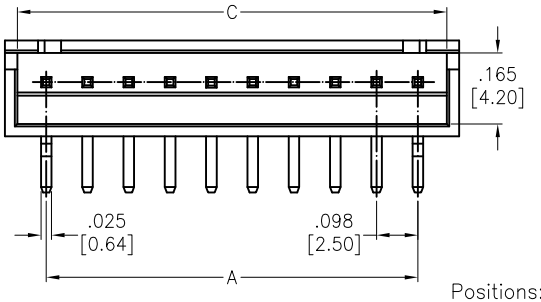



Positions: 02 thru 20
A = .098 [2.50] x of Spaces
B = .098 [2.50] x of Spaces +.197 [5.00]
C = .098 [2.50] x of Spaces +.138 [3.50]

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0, Glow wire compliant
Insulator color: Nature
Contacts: Brass, Tin plated
Electrical:
Voltage rating: 250V AC/DC
Current rating: 3A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	9/24/20
CHECKED	EY	9/24/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.098 [2.50] SHROUDED HEADER, RIGHT ANGLE

SIZE	PART NO.	REV.
X	25SH-B-XX-TR-GW	-

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1