

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/6/17	


APPROVED: _____


DATE: _____ TITLE: _____

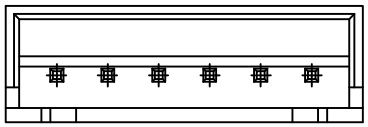

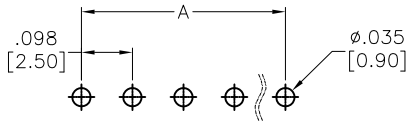

RECOMMENDED PCB LAYOUT

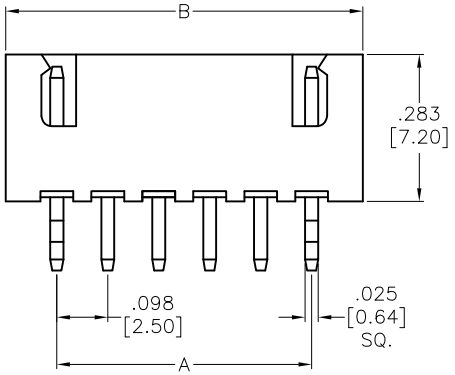



SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL94V-0
Insulator color: White
Contact: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250 V AC/DC rms
Current rating: 3 A (22AWG)
Contact Resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Withstand voltage: 1,000 VAC for 1 minute
Mechanical:
Wire range: 28~22 AWG
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 15
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	12/6/17
CHECKED	TY	12/6/17
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .098 [2.50] SHROUDED CRIMP HEADER STRAIGHT TYPE, TIN PLATED

SIZE	PART NO.	REV.
X	25SH-B3-XX-TS	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1