


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/22/21	


APPROVED: _____


DATE: _____ TITLE: _____

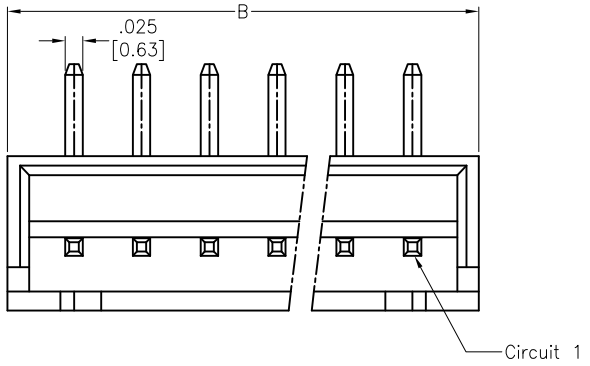

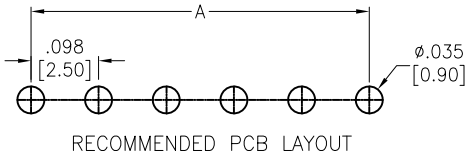



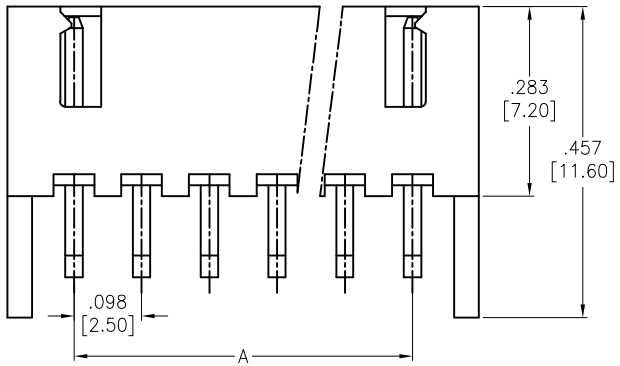

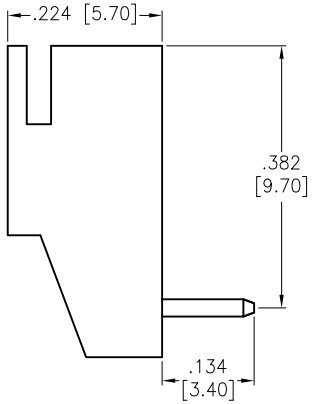

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: White
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Voltage rating: 250 VAC max
Current rating: 3 A AC/DC max
Contact resistance: .02Ω Max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: −25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	WX	12/22/21
CHECKED	YC	12/22/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.098 [2.50] SHROUDED HEADER
RIGHT ANGLE, PCB, TIN PLATED

SIZE	PART NO.	REV.
X	25SH-B7-XX-TR-NK	-

REF:	SCALE:	SHEET
S00111C	NTS	1 OF 1