

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/16/10	
A		ADDED DIM.	11/12/10	
B		ADDED DIM.	12/1/15	AY/YC

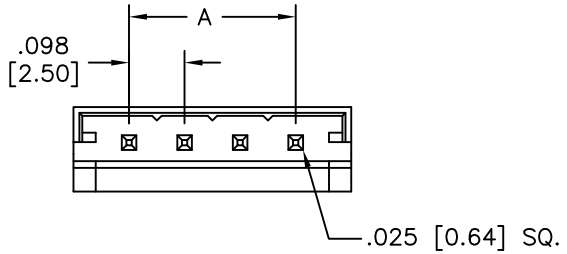

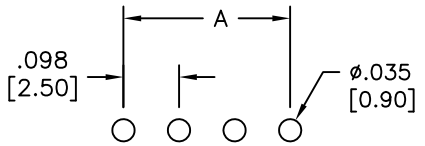

RECOMMENDED PCB LAYOUT

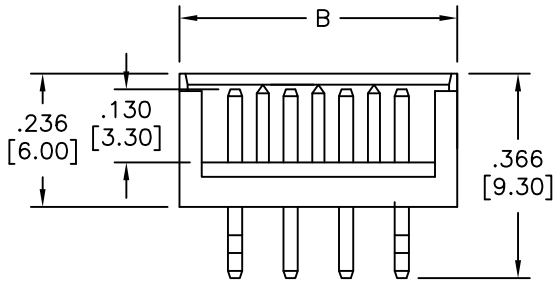

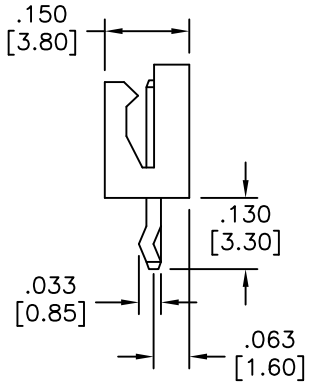

SPECIFICATIONS:

Material:
Insulator: Nylon, rated UL 94V–0
Insulator color: Nature
Contacts: Brass

Plating:
Matt Tin over Nickel underplate overall

Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 10 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:
Operating temperature: –25°C to +85°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 2 thru 15
A= No. of Spaces x .098 [2.50]
B= No. of Positions x .098 [2.50] +.098 [2.50]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	4/16/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2.5mm SHROUDED HEADER, SINGLE ROW, MATT TIN PLATED

SIZE	PART NO.	REV.
X	25SH-C-XX-MTS	B

REF: S00123T | SCALE: NTS | SHEET 1 OF 1