


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/31/09	
A		REDRAWN	05/15/12	
B		UPDATE DIM.	4/25/18	AY/SL

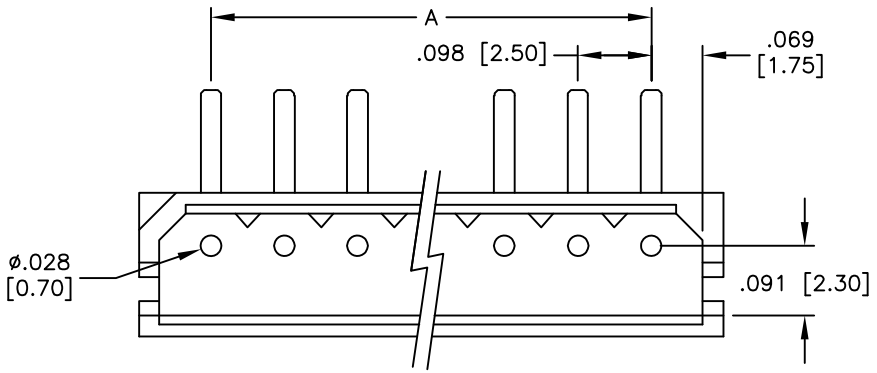

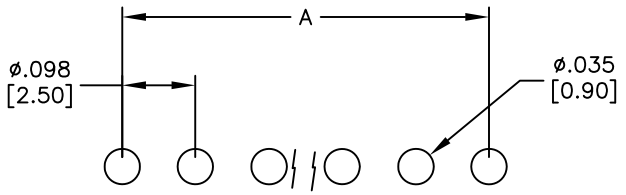

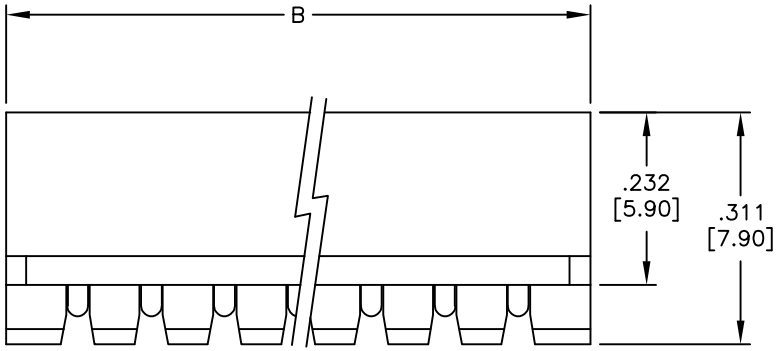

RECOMMENDED PCB LAYOUT

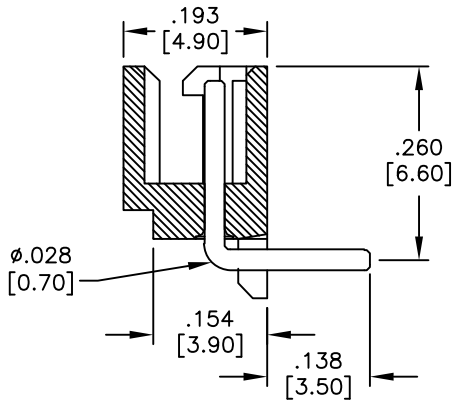

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: Beige
Contacts: Brass
Plating:
Matte Tin over Nickel underplate overall.
Electrical:
Voltage Rating: 250V AC
Current Rating: 3 Amps Max
Dielectric Withstanding Voltage: 1000V AC for 1 minute.
Insulation Resistance: 1000 Megohms Min
Contact Resistance: 20 Milliohms Max
Temperature Range: -40°C to 105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	7/31/09
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .098 [2.50] PITCH WAFER, RIGHT ANGLE PCB TYPE

SIZE	PART NO.	REV.
X	25SH-E-XX-MTR	B

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1