


APPROVED: _____

DATE: _____ TITLE: _____


| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 2/16/15 | |
| A | | UPDATE DRAWING | 4/12/16 | AY/AC |
| B | | UPDATE DRAWING | 4/22/16 | HR/AC |
| C | | UPDATE TEMPERATURE | 11/14/18 | AY/RC1 |

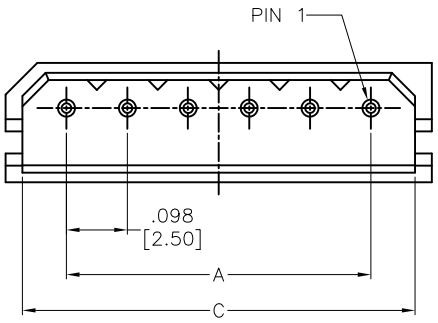


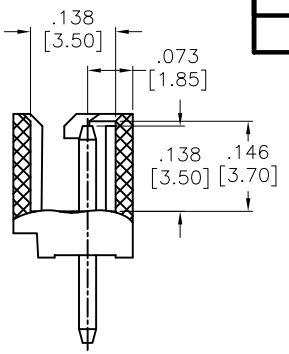


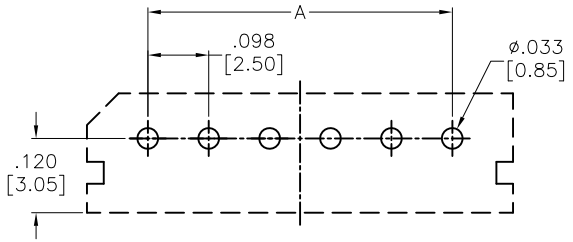

RECOMMENDED PCB LAYOUT

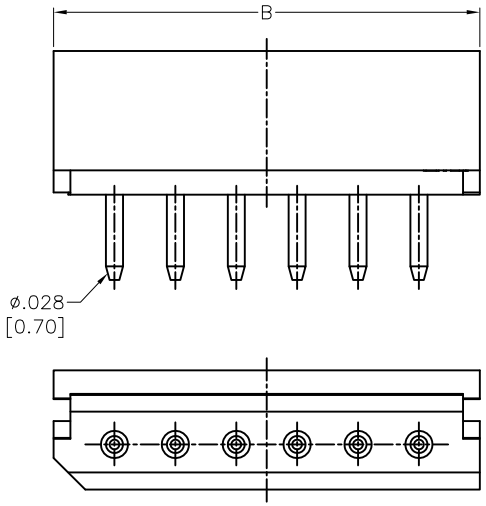

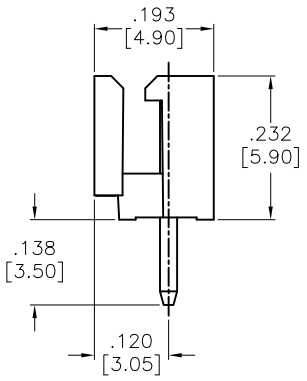
ASSEMBLY VIEW

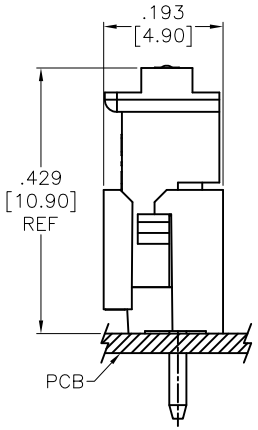SPECIFICATIONS:
Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Natural
Contacts: Brass
Plating:
Tin over copper underplate overall.
Electrical:
Voltage rating: 250 VAC/DC
Current rating: 3A AC/DC
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Deca BDE-free Halogen-free

Positions: 02 thru 16
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]
C = .098 [2.50] x No. of Spaces + .143 [3.62]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | AY | 2/16/15 |
| CHECKED | LL | 2/16/15 |
| APPROVED | | |


ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710


TITLE: .098 [2.50] PITCH WAFER, STRAIGHT PCB LOW PROFILE

| SIZE | PART NO. | REV. |
|---|---|---|
| X | 25SH-E-XX-TS-HF-HT | C |

REF: S00186T | SCALE: NTS | SHEET 1 OF 1