
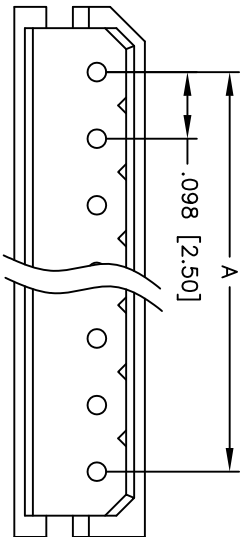




Rev	AWO #	Description	Date	Appr
-		RELEASED	1/18/13	

APPROVED: _____

DATE: _____ TITLE: _____

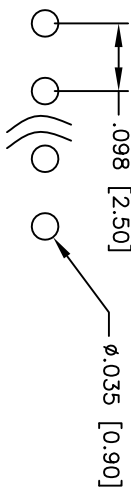

Recommended PCB Layout

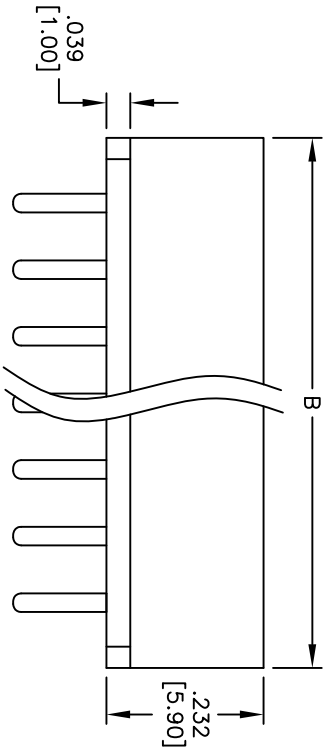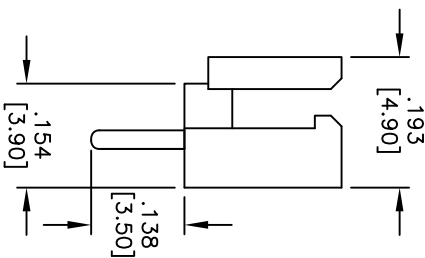

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-V2

Insulator color: Beige

Contacts: Brass

Plating:

Tin over copper underplate overall.

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Dielectric withstanding voltage: 1000 VAC for 1 minute

Mechanical:

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Positions: 02 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

.098 [2.50] PITCH WAFER, STRAIGHT PCB

LOW PROFILE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	AY		1/18/13	SIZE	PART NO.	REV.	
CHECKED	LW		1/18/13	X	25SH-E-XX-TS-V2		
APPROVED				REF:	S00124T	SCALE:	NTS

6

5

4

3

2

1