

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/29/14	


APPROVED: _____


DATE: _____ TITLE: _____

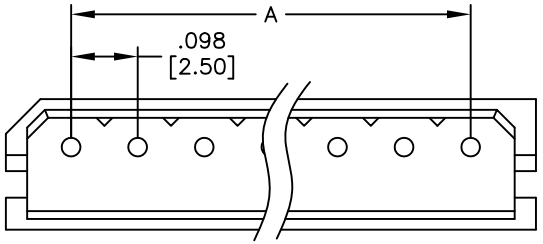

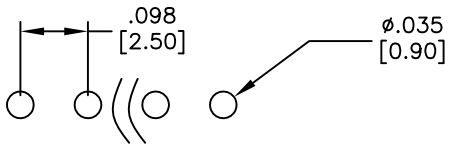

Recommended PCB Layout

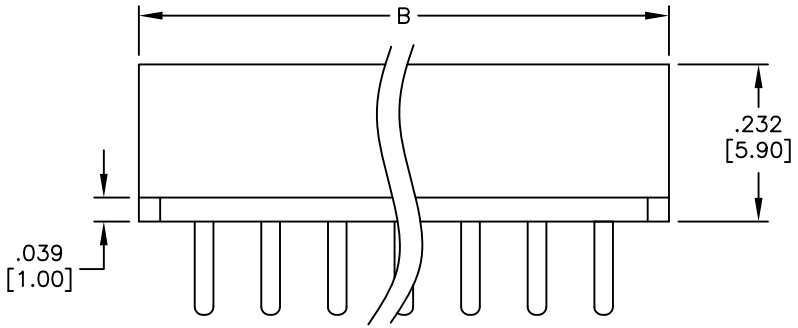

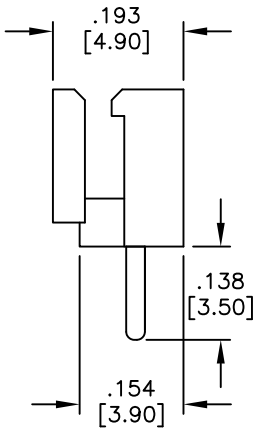

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V–V2
Insulator color: Beige
Contacts: Brass
Plating:
Tin over copper underplate overall.
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 20 mohms max
Dielectric withstanding voltage: 1000 VAC for 1 minute
Mechanical:
Temperature Rating:
Operating temperature: −40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Deca BDE-free Halogen-free

Positions: 02 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	5/29/14
CHECKED	AC	5/29/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .098 [2.50] PITCH WAFER, STRAIGHT PCB
LOW PROFILE, HALOGEN FREE

SIZE	PART NO.	REV.
X	25SH-E-XX-TS-V2-HF	-

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1