

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/4/16	
A		UPDATE DRAWING	4/15/20	OW/EY
B		UPDATE SPEC.	9/29/20	AY/OC
C		UPDATE SPEC.	11/8/21	WX/EY

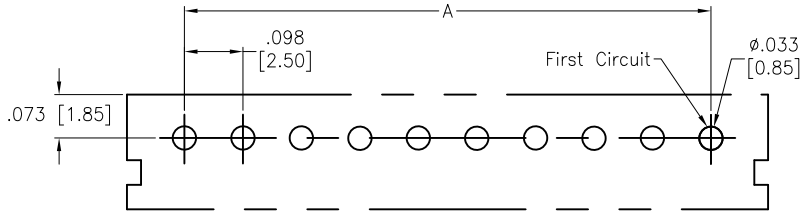


RECOMMENDED PCB LAYOUT

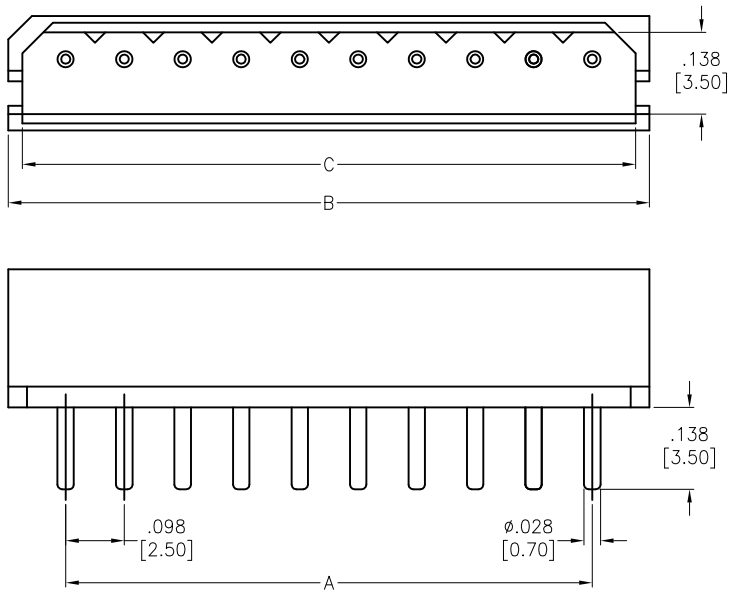

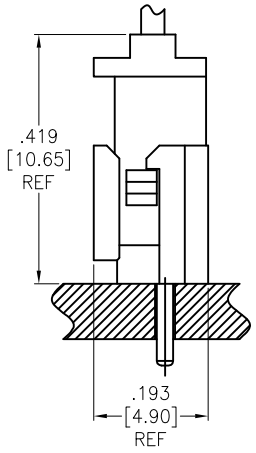

ASSEMBLY VIEW

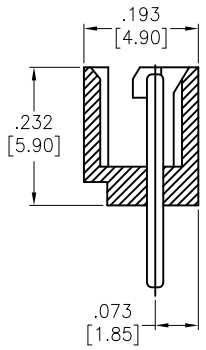

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Current rating: 3A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

-25°C to +85°C (B) (C)

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

Positions: 02 thru 15

A = .098 [2.50] x No. of Spaces

B = .098 [2.50] x No. of Spaces + .197 [5.00]

C = .098 [2.50] x No. of Spaces + .138 [3.50]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	HR	1/4/16
CHECKED	YC	1/4/16
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .098 [2.50] PITCH WAFER, STRAIGHT PCB TYPE

SIZE	PART NO.	REV.
X	25SH-E2-XX-TS	C

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1