

6

5

4

3

2


1

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/18/12	


APPROVED: _____

DATE: _____ TITLE: _____


D

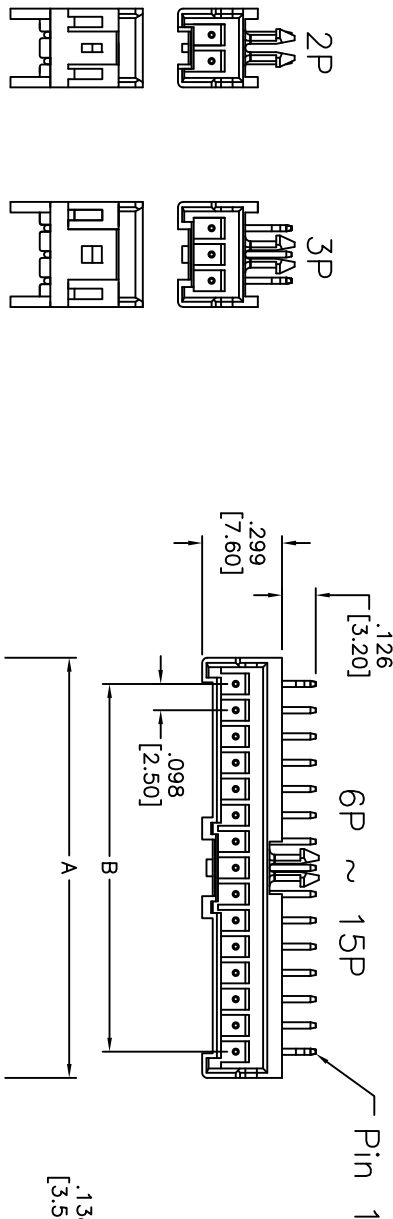

C

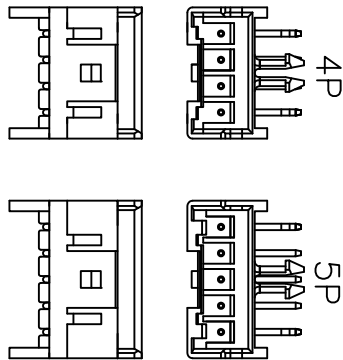

B

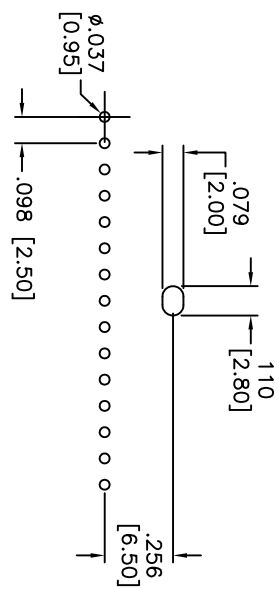

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Barss

Plating:

Tin over Copper underplate overall

Electrical:

Voltage Rating: 250V AC,DC

Current Rating: 3A AC,DC

Contact resistance: 10 Mohmx Max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

First & Last=kink pin
Positions: 02 thru 15
A = .098 [2.50] x No. of Spaces + .197 [5.00]
B = .098 [2.50] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

PLASTIC BOARDLOCKS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.XX	± .10	ØXX	± .10	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	AY	7/18/12					
CHECKED	NP	7/18/12					
APPROVED							
TITLE				PART NO.			
.098 [2.50] WIRE TO BOARD RIGHT ANGLE HEADER				25SHK-XX-TR-PBL			
SIZE				REV.			
X				-			
REF: S00123T				SHEET 1 OF 1			

A

A

6

5

4

3

2

1