

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/19/12	
A		REDRAWN	12/7/12	

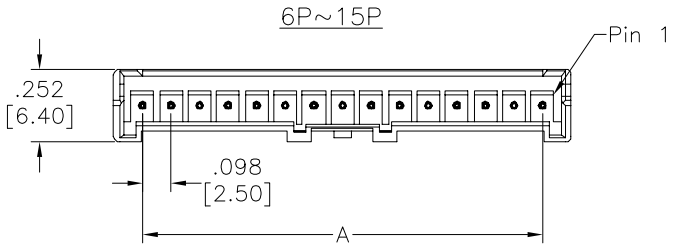


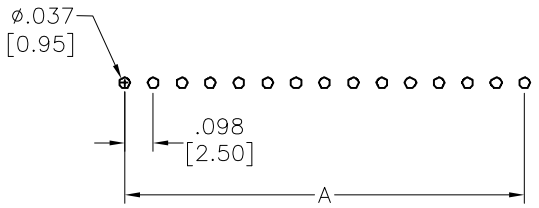

RECOMMENDED PCB LAYOUT

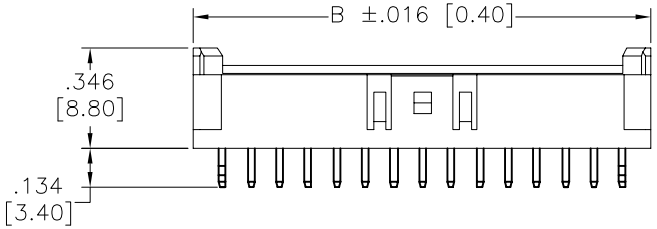



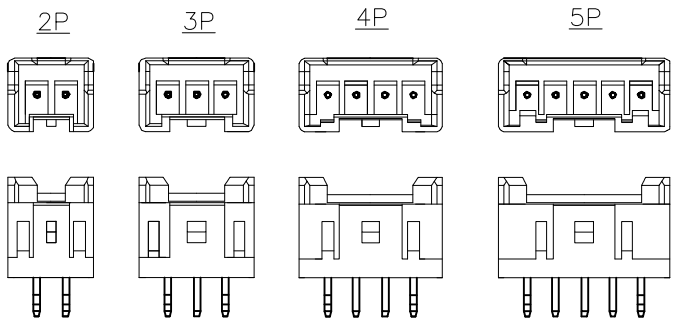

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: White
Contacts: Brass, Tin plated
Electrical:
Operating voltage: 250V AC, DC
Current rating: 3A AC, DC (#20, #22AWG)
Contact resistance: 10 Mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 15
A = .098 [2.50] x of Spaces
B = .098 [2.50] x of Spaces +.197 [5.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/19/12
CHECKED	TW	7/19/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.098 [2.50] SHROUDED CRIMP HEADER ASSEMBL
NO PEG

SIZE	PART NO.	REV.
X	25SH-K-XX-TS-NP	A

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1