

APPROVED: _____


DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 6/11/21 | |
| A | | UPDATE DRAWING | 2/7/23 | LH/NL |

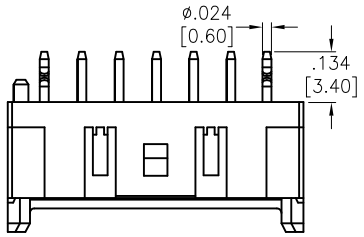






2PIN 3PIN 4~5PIN

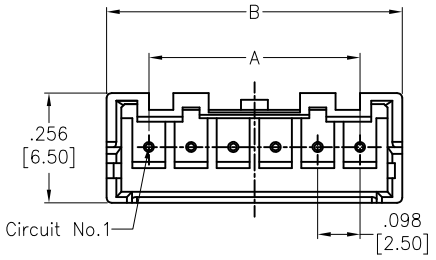



6~15PIN



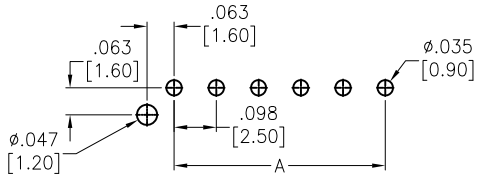
RECOMMENDED PCB LAYOUT

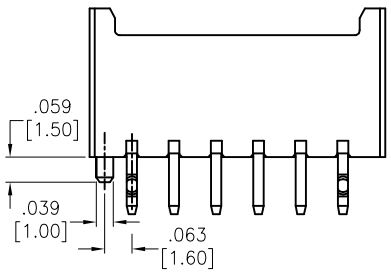


SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Blank-Nature

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 250V AC/DC

Current rating: 3A AC/DC

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

Positions: 02 thru 15

A= .098 [2.50] x No. of Space

B= .098 [2.50] x No. of Space + .197 [5.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| | | |
|---|---|---|
| DRAWN | WX | 6/11/21 |
| CHECKED | YC | 6/11/21 |
| APPROVED | | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .098 [2.50] WIRE TO BOARD STRAIGHT TIN PLATED, PEG, W/ KINK

| SIZE | PART NO. | REV. |
|---|---|---|
| X | 25SH-K3-XX-TS | A |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00111C | NTS | 1 OF 1 |