


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/11/21	

APPROVED: _____


DATE: _____ TITLE: _____

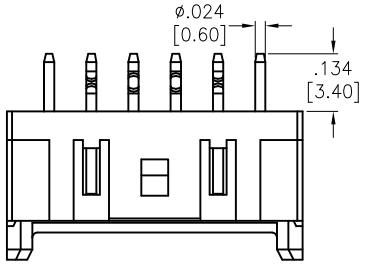


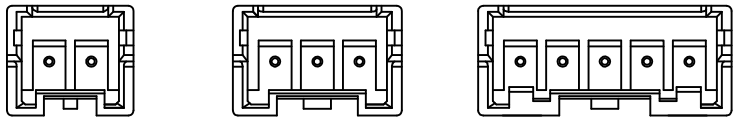

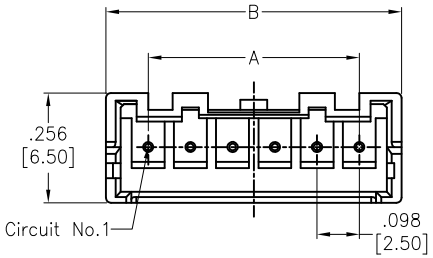


6~15PIN





RECOMMENDED PCB LAYOUT



SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Blank-Nature

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 250V AC/DC

Current rating: 3A AC/DC

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

Positions: 02 thru 15

A= .098 [2.50] x No. of Space

B= .098 [2.50] x No. of Space + .197 [5.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	WX	6/11/21
CHECKED	YC	6/11/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .098 [2.50] WIRE TO BOARD STRAIGHT TIN PLATED, NO PEG, W/ KINK

SIZE	PART NO.	REV.
X	25SH-K3-XX-TS-NP	-

REF:	SCALE:	SHEET
S00111C	NTS	1 OF 1