


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/16/22	

APPROVED: _____


DATE: _____ TITLE: _____

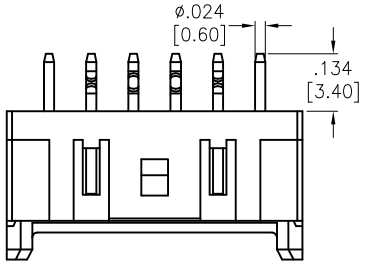


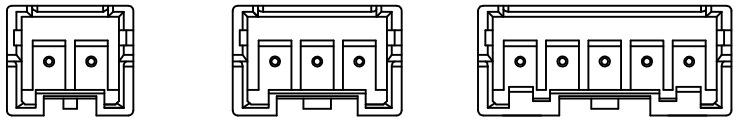

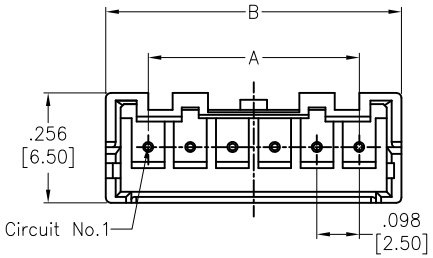


6~15PIN





RECOMMENDED PCB LAYOUT



SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Blank-Nature
Plating:
Tin over Nickel underplate overall
Electrical:
Voltage rating: 250V AC/DC
Current rating: 3A AC/DC
Contact resistance: 10 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 02 thru 15
A= .098 [2.50] x No. of Space
B= .098 [2.50] x No. of Space + .197 [5.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	3/16/22
CHECKED	YC	3/16/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .098 [2.50] WIRE TO BOARD STRAIGHT TIN PLATED, NO PEG, W/ KINK

SIZE	PART NO.	REV.
X	25SH-K3-XX-TS-NP-T/R	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1