


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/1/22	
A		UPDATE DRAWING	3/15/22	LH/LL1

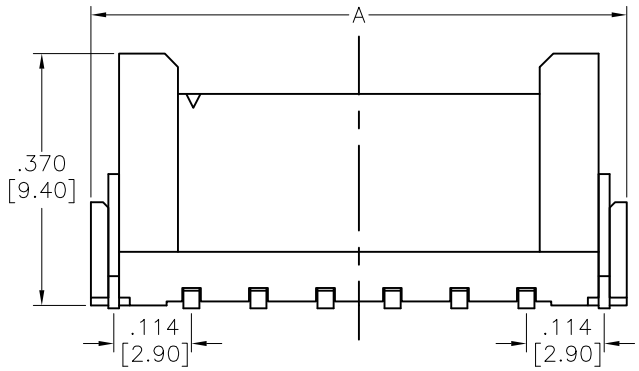

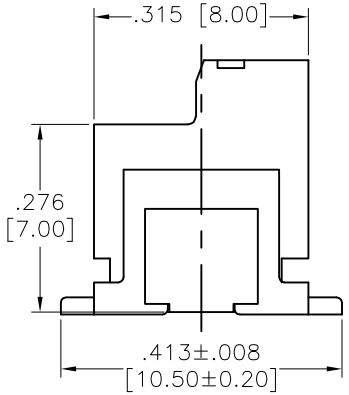

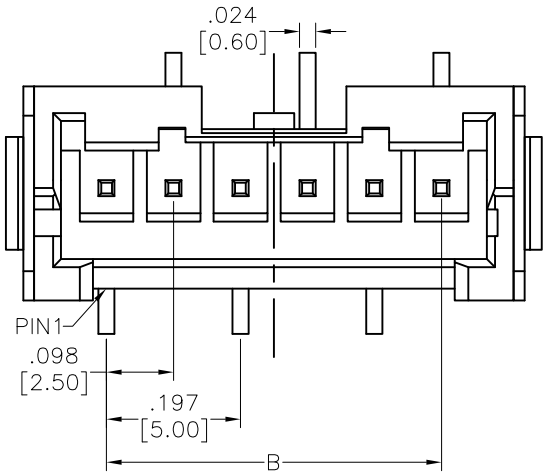

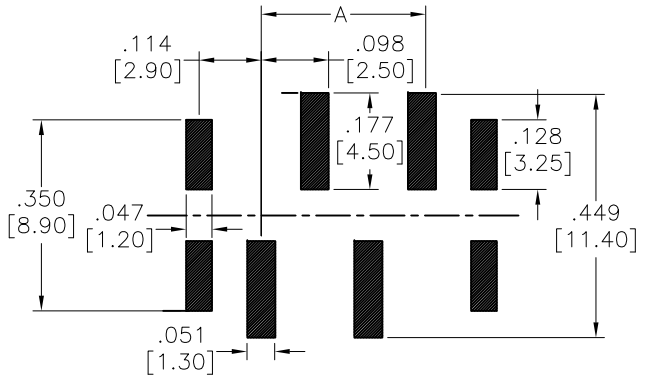

RECOMMENDED PCB LAYOUT

PACKAGED ON TAPE & REEL
Positions: 2 thru 15
A= .098 [2.50] x No. of Positions + .197 [5.00]
B= .098 [2.50] x No. of Space

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Contacts: Copper alloy, Tin plated
Electrical:
Voltage rating: 250V AC, DC
Current rating: 3A AC, DC (#24AWG)
Contact resistance: 100m Ω max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Mechanical:
Wire range :AWG #24 to #27
Temperature Rating:
-25°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	JJ	3/1/22
CHECKED	KL	3/1/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .098 [2.50] PITCH DISCONNECTABLE CRIMP STYLE CONNECTORS

SIZE	PART NO.	REV.
X	25SH-K4-XX-TS-SMT-T/R	A

REF:	SCALE:	SHEET
S00181C	NTS	1 OF 1