

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/11/12	


APPROVED: _____


DATE: _____ TITLE: _____

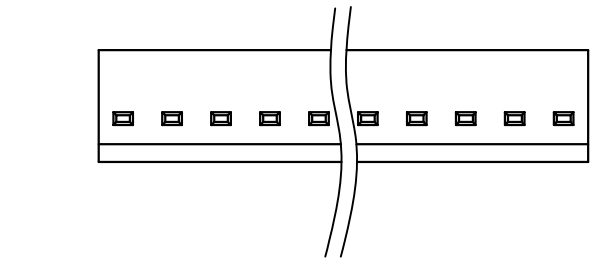

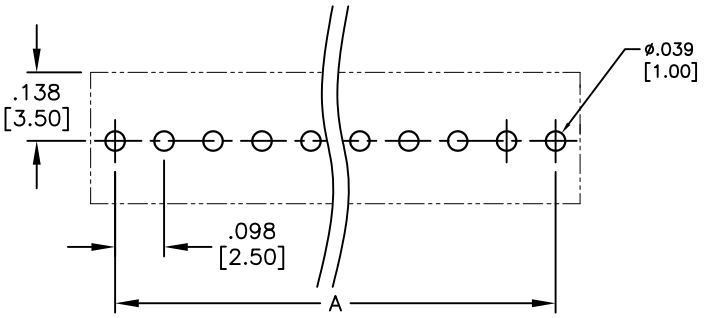

RECOMMENDED PCB LAYOUT

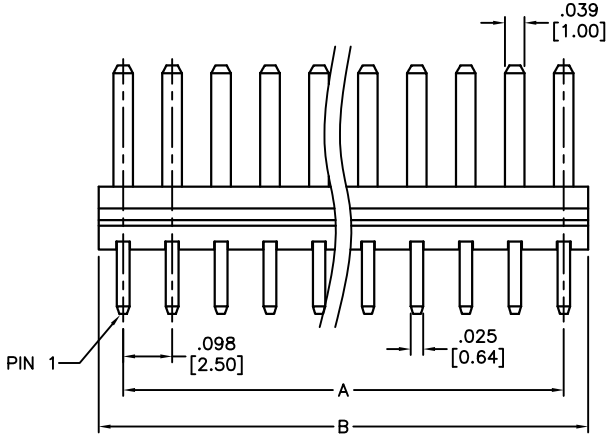

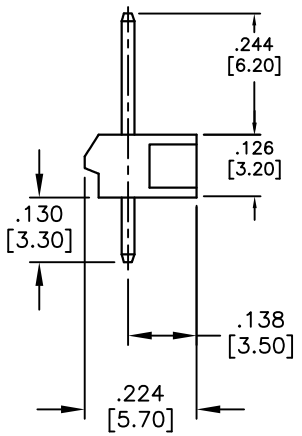

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V–0
Insulator color: White
Contacts: Brass
Plating:
Tin over copper underplate overall.
Electrical:
Voltage Rating: 250V AC
Current Rating: 3 Amps Max
Contact resistance: 15 mohms max. initial
Insulation resistance: 1500 Mohms min.
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Temperature Range: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Positions

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	6/11/12
CHECKED	AH	6/11/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .098 [2.50] PITCH WAFER, VERTICAL PCB TYPE

SIZE	PART NO.	REV.
X	25SH-M-XX-TS	-

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1