


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/12/15	


APPROVED: _____

DATE: _____ TITLE: _____

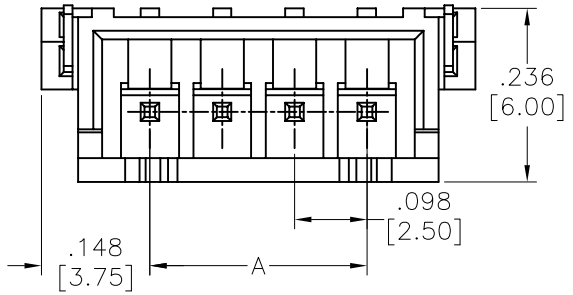

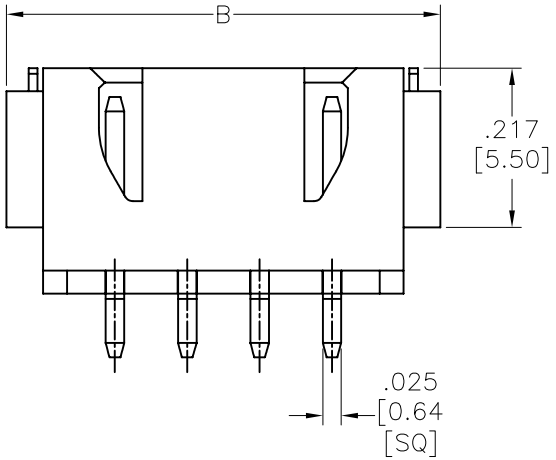

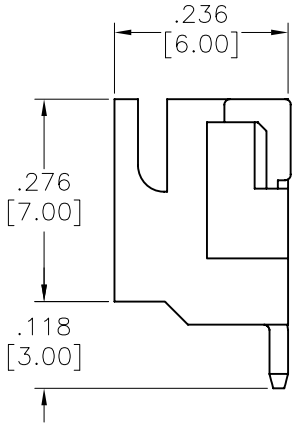

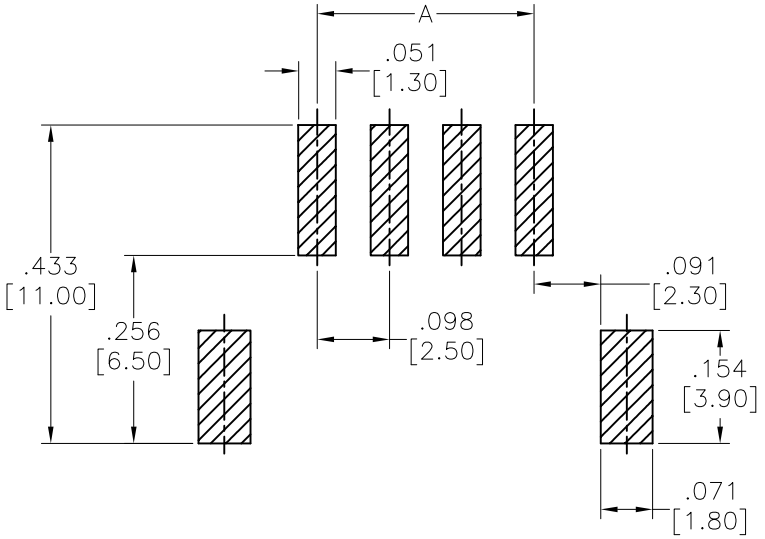

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: White
Contacts: Barss
Plating:
Tin over Copper underplate overall
Electrical:
Voltage Rating: 250V AC,DC
Current Rating: 3A AC,DC
Contact resistance: 10 Mohmx Max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 02 thru 15
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .295 [7.50]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	10/12/15
CHECKED	LW	10/12/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.098 [2.50] WIRE TO BOARD RIGHT ANGLE HEADER SMT TYPE

SIZE	PART NO.	REV.
X	25SH-P-XX-TR-SMT-T/R	-

REF:	SCALE:	SHEET
S00121C	NTS	1 OF 1