

APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/18/14	
A		ADDED SPEC.	8/10/15	AY/MW

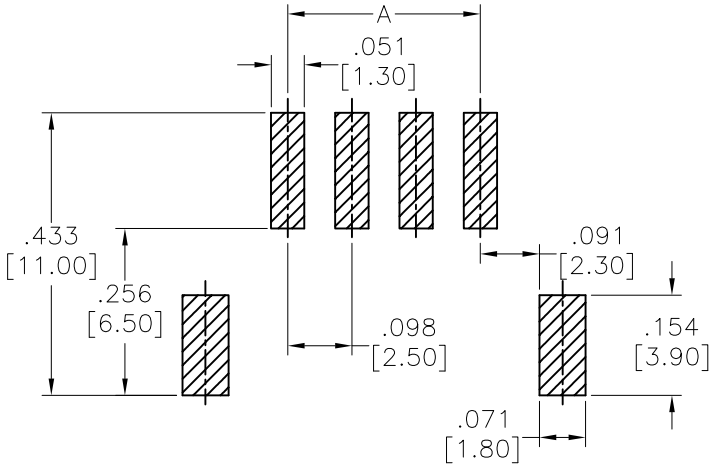



RECOMMENDED PCB LAYOUT

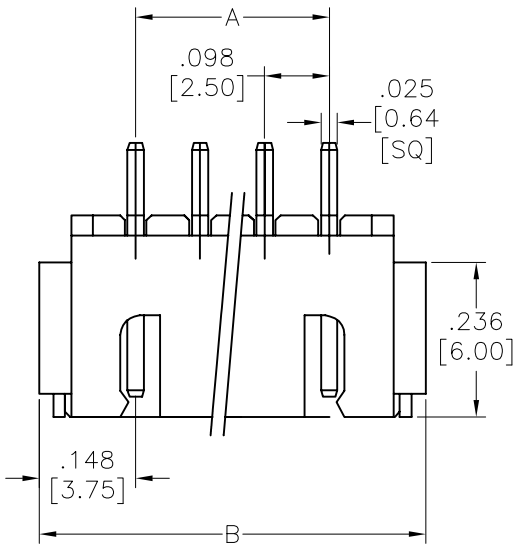

3P–16P



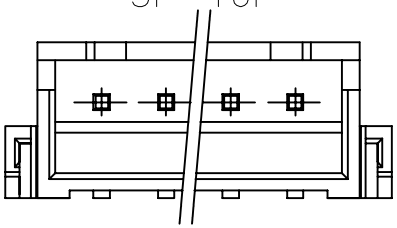

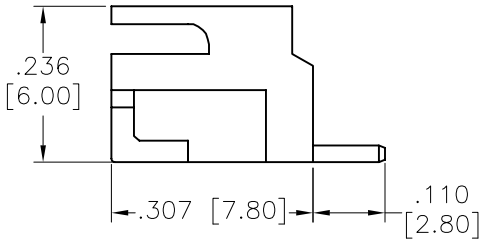

SPECIFICATIONS:

Material:

Insulator: Hi–temp thermoplastic, rated UL 94V–0

Insulator color: White

Contacts: Barss

Solder Tab: Brass, Gold plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage Rating: 250V Max

Current Rating: 3A AC,DC

Contact resistance: 10 mohmx max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: –25°C to +85°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 02 thru 15

A = .098 [2.50] x No. of Spaces

B = .098 [2.50] x No. of Spaces + .295 [7.50]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	9/18/14
CHECKED	SC	9/18/14
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

.098 [2.50] WIRE TO BOARD RIGHT ANGLE HEADER SMT TYPE, GOLD PLATED

SIZE	PART NO.	REV.
X	25SH-P1-XX-GR-SMT-T/R	A

REF: S00015T | SCALE: NTS | SHEET 1 OF 1