

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/12/15	


APPROVED: _____

DATE: _____ TITLE: _____

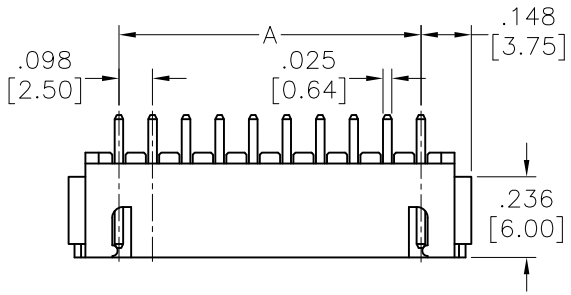






2 Circuit

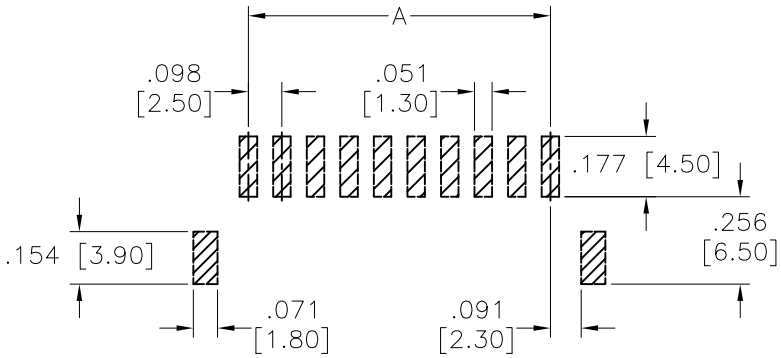

RECOMMENDED PCB LAYOUT

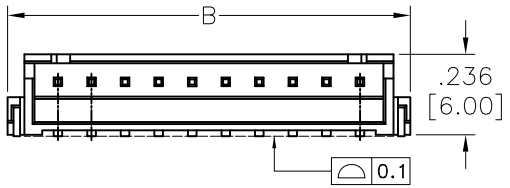



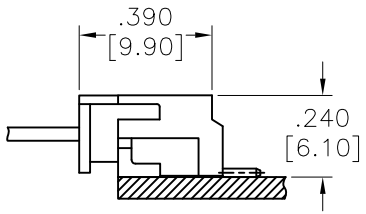

ASSEMBLY VIEW

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: White
Contacts: Barss
Nail: Brass, Tin plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current Rating: 3A AC/DC
Contact resistance: 10 Mohmx Max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Temperature range: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 02 thru 16
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .295 [7.50]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	5/12/15
CHECKED	NC	5/12/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.098 [2.50] WIRE TO BOARD RIGHT ANGLE HEADER
SMT TYPE, GOLD PLATED

SIZE	PART NO.	REV.
X	25SH-P2-XX-GR-SMT-T/R	-

REF: S00124T | SCALE: NTS | SHEET 1 OF 1