


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/3/20	
A		UPDATE DRAWING	7/3/23	LH/LX

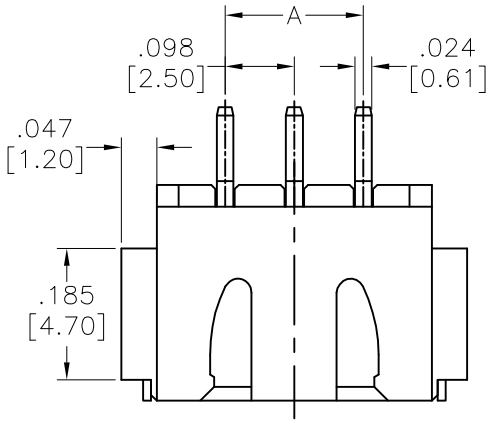


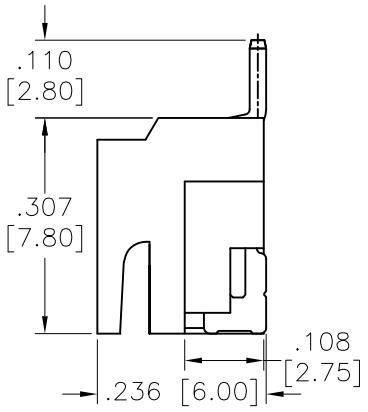



2P

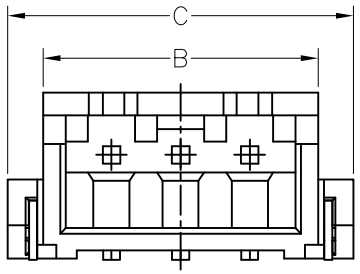

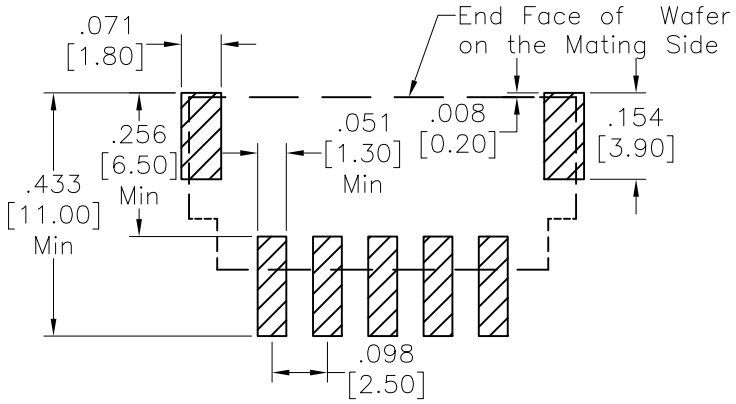

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Barss

Solder Tab: Brass, Tin plated

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 250V AC/DC

Current Rating: 3A AC/DC

Contact resistance: 20 Mohmx Max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Mechanical:

Applicable Wire: 28~22AWG

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 02 thru 16

A = .098 [2.50] x No. of Spaces

B = .098 [2.50] x No. of Spaces + .195 [4.95]

C = .098 [2.50] x No. of Spaces + .295 [7.50]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	8/3/20
CHECKED	RL	8/3/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .098 [2.50] WIRE TO BOARD RIGHT ANGLE HEADER SMT TYPE, TIN PLATED, TAPE & REEL

SIZE	PART NO.	REV.
X	25SH-P3-XX-TR-SMT-T/R	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1