

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/22	

APPROVED: _____


DATE: _____ TITLE: _____

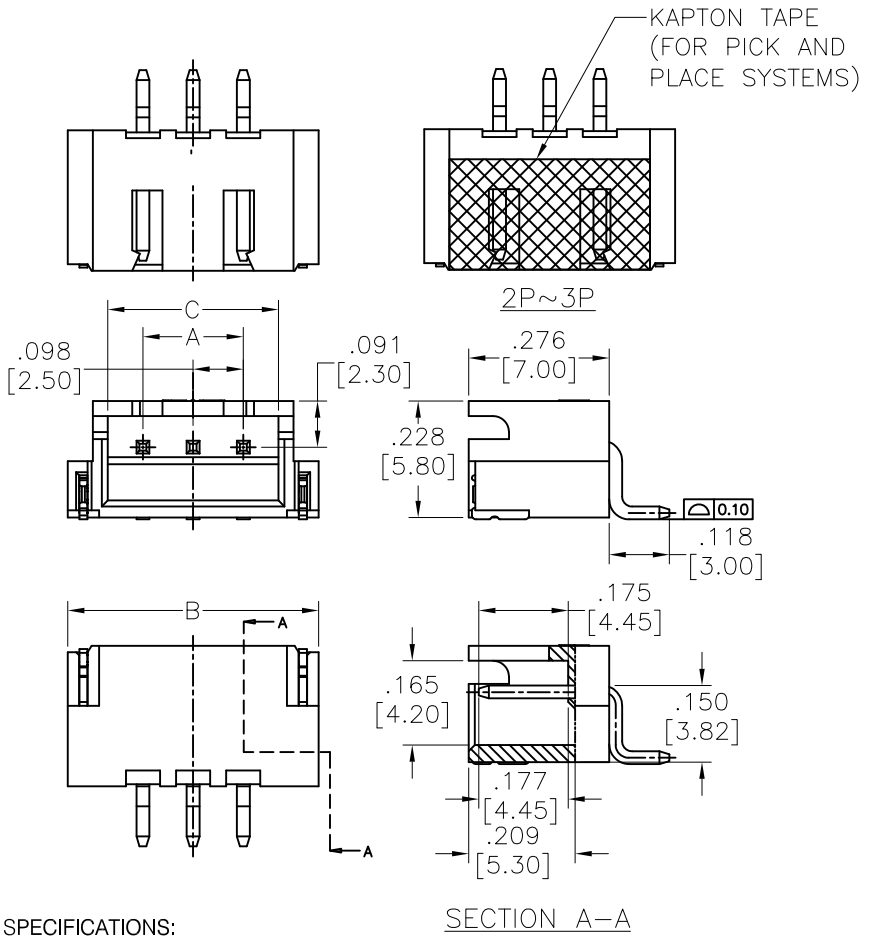

SECTION A–A

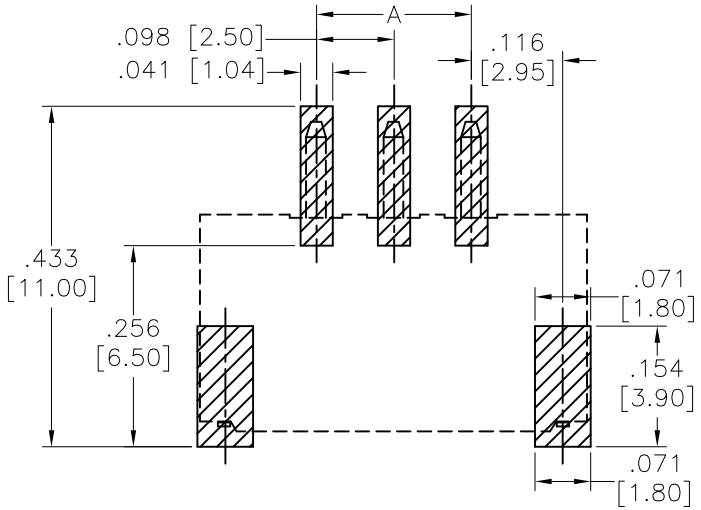

RECOMMENDED PCB LAYOUT

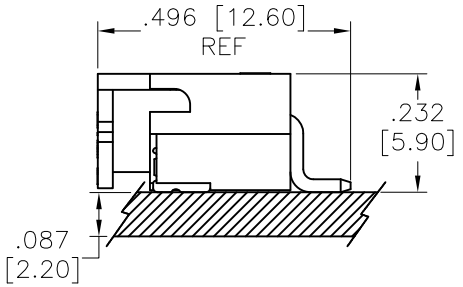

SPECIFICATIONS:

Material:

Insulator: Hi–temp thermoplastic, rated UL 94V–0

Insulator color: Natura

Contacts: Barss

Plating:

Tin over Copper underplate overall

Electrical:

Voltage Rating: 250V AC,DC

Current Rating: 3A AC,DC

Contact resistance: 10 Mohmx Max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: –25°C to +85°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

Deca BDE-free Halogen-free

PACKAGED ON TAPE & REEL

Positions: 02 thru 15

A = .098 [2.50] x No. of Spaces

B = .098 [2.50] x No. of Spaces + .295 [7.50]

C = .098 [2.50] x No. of Spaces + .295 [3.50]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	JJ	5/26/22
CHECKED	KL	5/26/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .098 [2.50] WIRE TO BOARD RIGHT ANGLE HEADER, SMT TYPE

SIZE	PART NO.	REV.
X	25SH-P4-XX-TR-SMT-HF-T/R	-

REF: S00186T | SCALE: NTS | SHEET 1 OF 1